

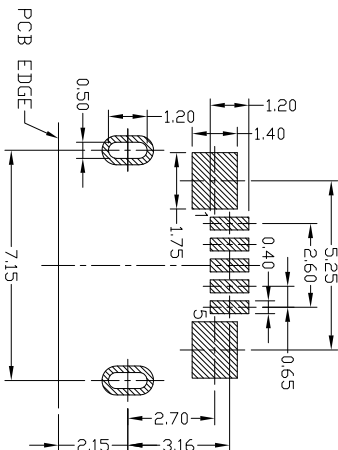







RECOMMENDED PCB LAYOUT

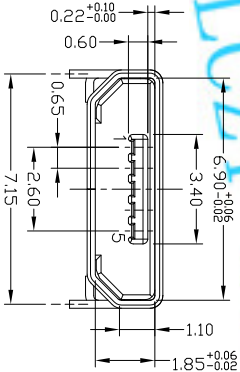

NOTES:
1.ELECTRICAL:
1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX
/ PIN2&3&4 1AMP MAX, .30V AC;
2)INSULATION RESISTANCE: 100MΩ MIN;
3)CONTACT RESISTANCE: 30mΩ MAX;
4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5)OPERATING TEMPERATURE:-30°C TO +80°C.
2.Mechanical:
1)Mating Force: 35N MAX
2)Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▲" TO BE
CHECKED BY Q.C & IPQC.

4.PART ND.
MUYF-05*1-4BHUA042
1Au 1U"
6Au 30U"
T.TIN
NICKEL
W/WHITE
B/BLACK
1PBT
2PAGT
3PA9T
4LCP

Bill of materials:

3	SHELL	COPPER ALLOY / STAINLESS STEEL	1	PLATED TIN	X: ±0.35 X: ±0.30		X': ±2" X': ±1"	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25 .XXX ±0.15		.XX' .XXX'	SEE NOTE FINISH										
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD				SEE NOTE										
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED. ANY REPRODUCTION OR USE IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED IS STRICTLY PROHIBITED.				 Q'TY	DR: CHKD: APPD:	Stucky Stucky Stucky	2018/5/15 2018/5/15 2018/5/15	DWG NO.: AII-HUA042	PART NO.: MUYF-05*1-4BHUA042	SCALE 5:1	SHEET 1/1	REV. A	CUSTOMER DRAWING