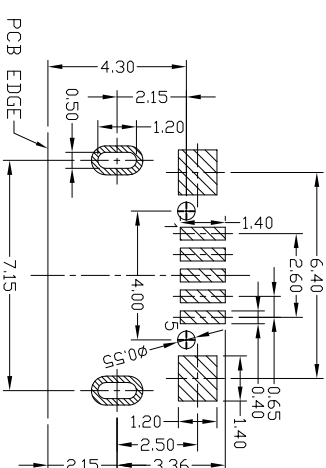



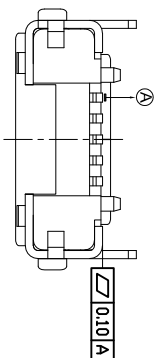
[illegible]

RECOMMENDED PCB LAYOUT

NOTES:
1. ELED

- 1) VOLTAGE CURRENT RATING: PIN 1 & 5 1.8AMP MAX / PIN 2 & 3 4 1AMP MAX, 30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 100V AC, FOR 1 MIN
- 5) OPERATING TEMPERATURE: -30°C TO +80°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Umating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYF-05*T-4BHUA045

1:AU 1U^o —
6:AU 30U^o —
T:TiN —
N:Nickel —
W:White —
B:Black —
1:PBT —
2:PA6T —
3:PA9T —

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE: MICRO USB B TYPE F 5P 插板7.2 有导位有柱 外壳加焊盘脚长1.1				PART NO.: MUyf-05XT-4BHUA045					
DR: <i>Stacy</i> 2018/9/11				DWG NO.: AII-HUA045					
CHKD: <i>Stacy</i> 2018/9/11				SCALE		SHEET		REV.	
APPD:				5:1		1/1		A	
								CUSTOMER DRAWING	
UNITS mm									
MATERIAL				SEE NOTE					
FINISH				SEE NOTE					
SEE NOTE				SEE NOTE					
Q'TY				Q'TY					
									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED INC.				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED INC.					
X. ±0.35		X. ±2°		UNITS					
.X ±0.30		.X° ±1°		MATERIAL					
.XX ±0.25		.XX°		SEE NOTE					
.XXX ±0.15		.XXX°		FINISH					
				SEE NOTE					
QTY		FINISHING		QTY					
MATERIAL				MATERIAL					
COPPER ALLOY		PLATED GOLD		COPPER ALLOY					
TERMINAL		UL94V-0		TERMINAL					
Housing		LCP+30%GF		Housing					
SHELL		PLATED TIN		SHELL					
STAINLESS STEEL				STAINLESS STEEL					