

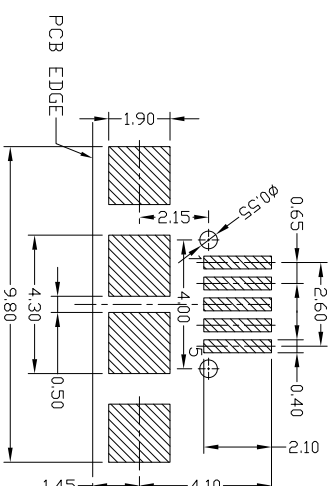

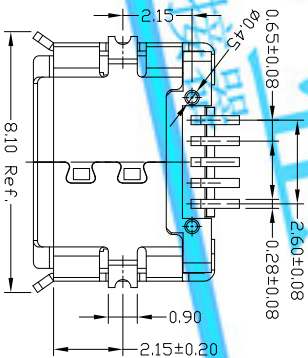
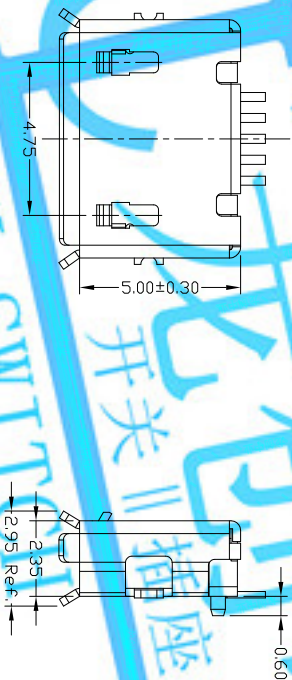


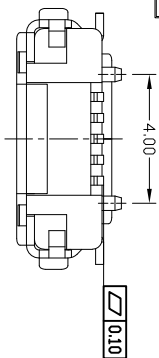

RECOMMENDED PCB LAYOUT

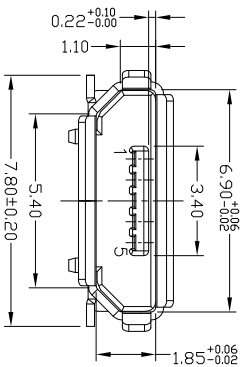

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN 1 & 5 1.8AMP MAX / PIN 2 & 3 & 4 1AMP MAX, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYF-05*1-4BHUA139
1AU 1U*
6AU 30U*
1-TTN
NICKEL
W/WHITE
BLACK
1-PT
2-PA6T
3-PA9T
4-LCP

Bill of materials:

3	SHELL	COPPER ALLOY	1	PLATED TIN	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
					X: ±0.30	X: ±1°	MAT'L						
							SEE NOTE						
							SEE NOTE						
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX°	FINISH	TITLE:		PART NO.:			
					.XXX ±0.15	.XXX°	SEE NOTE	DR: <i>Jacky</i> 2018/9/10		MUJF-05XT-4BHUA139			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED. ANY REPRODUCTION OR USE IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED IS STRICTLY PROHIBITED.			Q'TY	CHKD: <i>Jacky</i> 2018/9/10	DWG NO.:		AII-HUA139	
ND	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE		SHEET	REV.	CUSTOMER
									5:1	1/1	A		DRAWING