

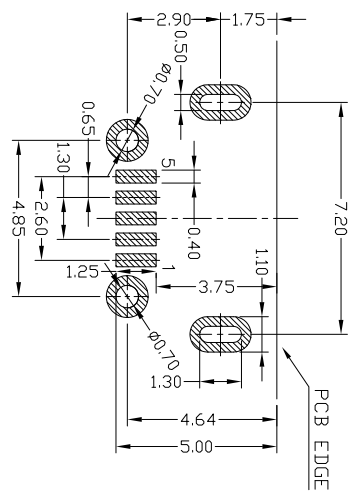

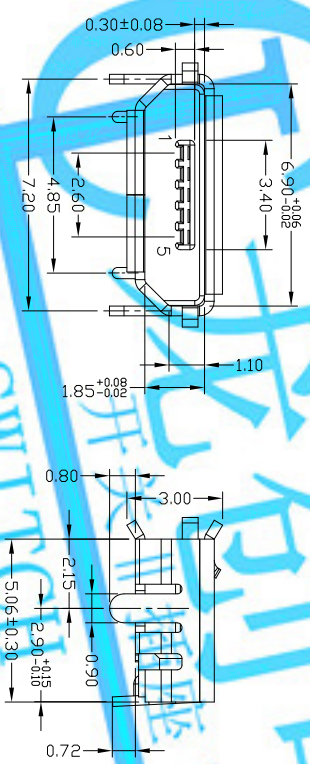





RECOMMENDED PCB LAYOUT



NOTES:
1.ELECTRICAL:
1>VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. 30V AC;
2>INSULATION RESISTANCE: 100MΩ MIN;
3>CONTACT RESISTANCE: 30mΩ MAX;
4>WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5>OPERATING TEMPERATURE:-30℃ TO +80℃.

2.Mechanical:
1>Mating Force: 35N MAX
2>Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING
3	SHELL	STAINLESS STEEL / COPPER ALLOY	1	PLATED TIN	MM		LONGCHUANG ZHONGYE (HK)CO.,LIMITED		5:1	1/1	A	
2	HOUSING	LCP+30%GF	1	UL94V-0	SEE NOTE							
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	SEE NOTE							
ND	PARTS	MATERIAL	QTY	FINISHING	Q'TY							