

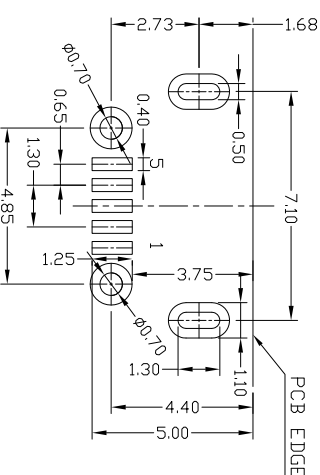

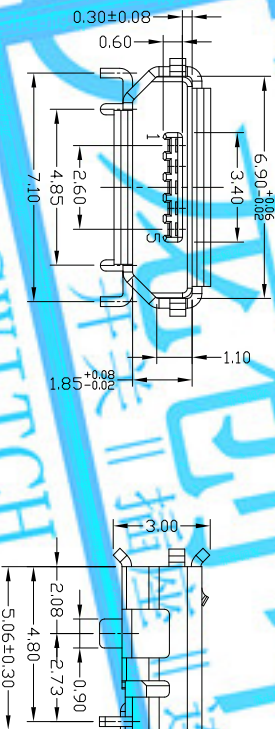




RECOMMENDED PCB LAYOUT



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN 1 & 5 1.8AMP MAX / PIN 2 & 3 & 4 1AMP MAX, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYF-05*1-4BHUA722

1AU 1U" 6AU 30U"

1-PBT W/WHITE B/BLACK

2-PA6T 3-PA9T 4-LCP

1-TIN NICKEL

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:					PART NO.:				
MICRO USB B TYPE F 8P 四腳全插 7.1 4.85					MUYF-05XT-4BHUA722				
DR: <i>Jacky</i> 2019/03/27					DWG NO.: AII-HUA722				
CHKD: <i>Jacky</i> 2019/03/27					SCALE SHEET REV. CUSTOMER DRAWING				
APPD:					5:1 1/1 A				
		Q'TY							
		SEE NOTE		FINISH					