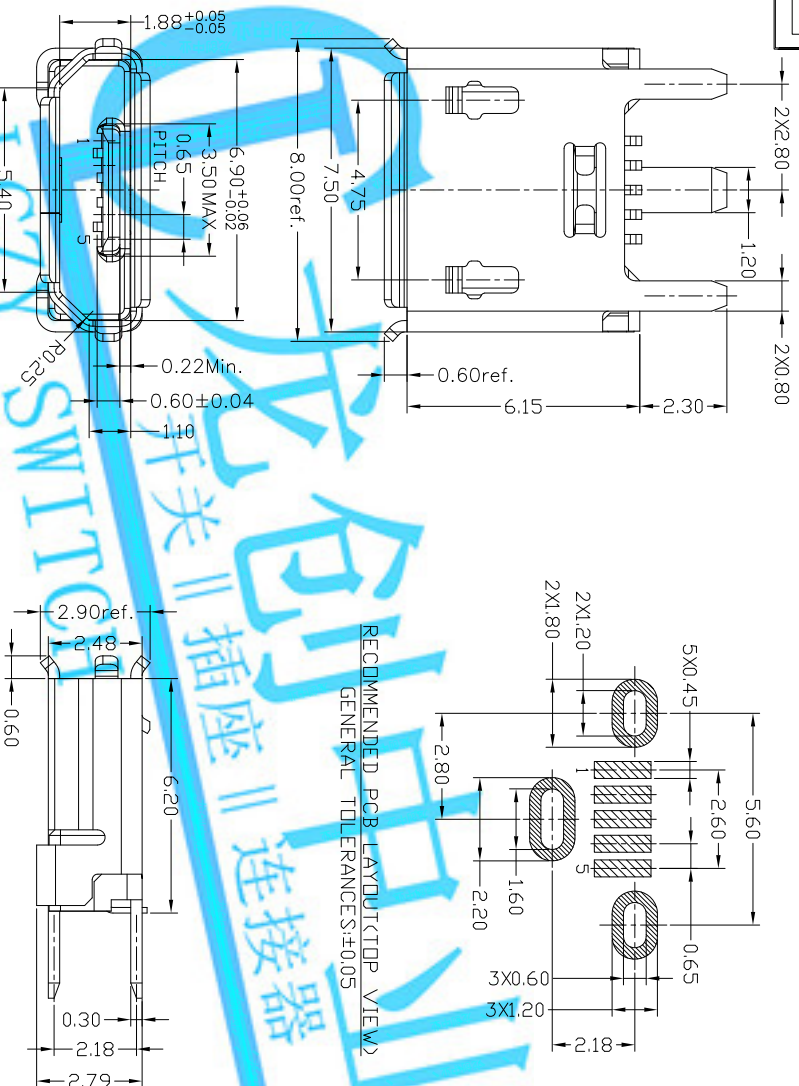


5	GND
4	ID
3	D+
2	D-
1	VBUS
PIN	NAME

PIN ASSIGNMENT

NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: PIN1&5 18AMP MAX / PIN2&3&4 05AMP MAX, 30V AC;
 - 2) INSULATION RESISTANCE: 100M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC, FOR 1 MIN
 - 5) OPERATING TEMPERATURE: -30°C TO +80°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 8N MIN.
3. DIMENSIONS MARKED "▲" TO BE CHECKED BY QC & IPQC.

4. PART NO.

MUYF-05*N-4BQS20

1: Au 10 ⁻	— W: WH
6: Au 30U ^m	B: BLA

T:IN —
N:NICKEL
I:PT

3:PA3
4:LCF

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED										
5				.X	±0.30	X.*	±10°	UNITS	mm	
4	CAP	LCP+30%GF	1	UL94V-0	.XX	±0.20	.X*	±8°	MAT'L	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX	±0.10	.XX*	±5°	SEE NOTE	
2	CONTACT	COPPER ALLOY	5	PLATED GOLD				FINISH	SEE NOTE	
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					Q'TY
ND	PARTS	MATERIAL	QTY	FINISHING						APPD:
TITLE: MICRO USB B TYPE F 5P 180 度SM 有翻边外罩3支脚										
PART NO.: MUYF-05XN-4BQS20										
DWG NO.: ALL-QS20										
CHKD: Ricky 2018/07/03										
SCALE SHEET REV. CUSTOMER DRAWING										
1:1 1/1 B										