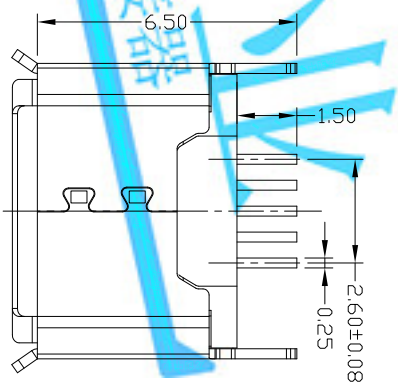
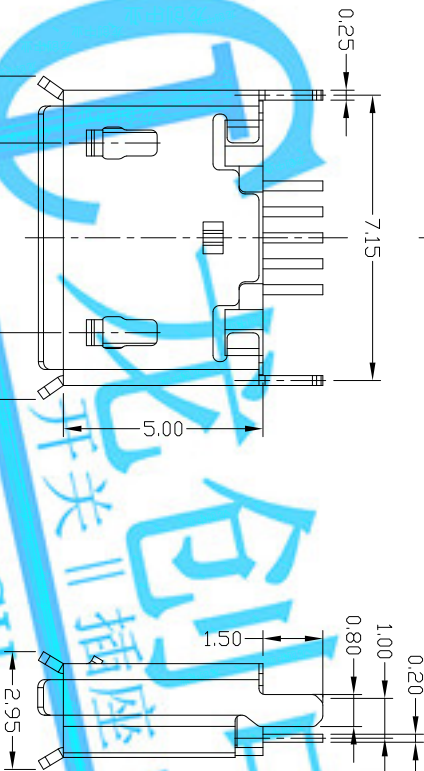



NOTES:
1.ELECTRICAL:

```
1>ELECTRICAL:
1>VOLTAGE 0
```

1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP
MAX / PIN2&3&4 1AMP MAX. ,30V AC;

MAX / PIN2&3&4 1AMP MAX, 30V AC;
2)INSULATION RESISTANCE: 100MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

3) DC INPUT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
EXCEEDING THESE STANDARDS.

4) WITHSTANDING VOLTAGE: 100 V AC, FOR 1
5) OPERATING TEMPERATURE: -30°C TO +80°C.

2. Mechanical:

1)Mating Force: 35N MAX

2) Unmating Force: 10N MIN

3.DIMENSIONS MARKED "▼" TO BE
CHECKED BY Q.C & IPQC.

4. PART NO.

MUYF-05*T-4BPUA678

1:Au 1U" —
6:Au 30U" —

W: WHITE
B: BLACK

6: Au 30U

T: TIN
N: NICKEL

4:LCp

4:LCp

4:LCp

4:LCp

—B:BLACK

—B:BLACK

Bill of materials:

[illegible]