
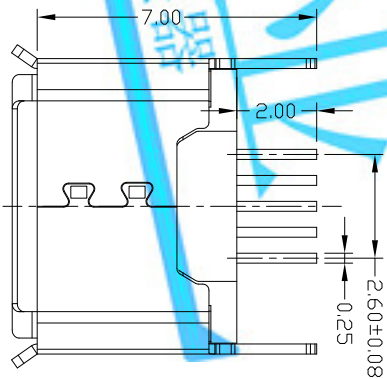
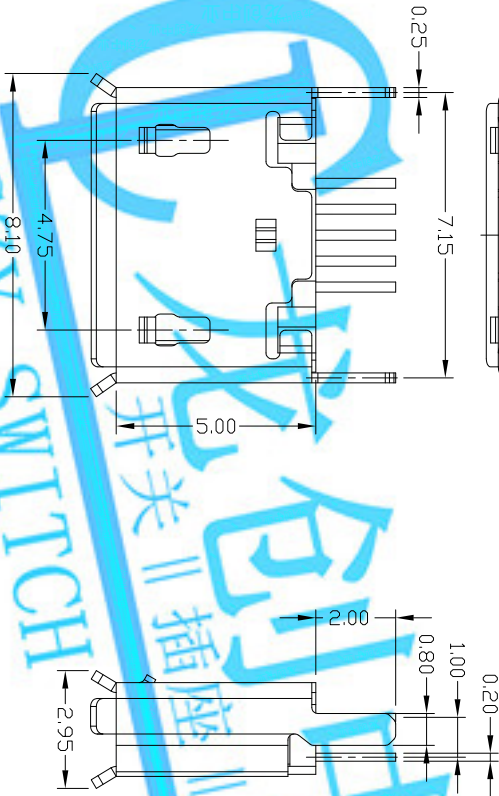



- NOTES:
- 1.ELECTRICAL:
- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX, 30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TD +80°C.
- 2.Mechanical:
- 1)Mating Force: 35N MAX
- 2)Umating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

3	SHELL	STAINLESS STEEL	1	PLATED TIN	X: ±0.35 X: ±0.30	X' ±2" X' ±1"	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25 .XXX ±0.15	.XX' .XXX'	SEE NOTE FINISH								
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	SEE NOTE										
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATION AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATION INC.										
								TITLE: MICRO USB B TYPE F 5P 180度 插板脚R2.0							
							DR: <i>Stacy</i> 2018/3/26						PART NO.:	MUYF-05*T-4BPUA676	
							CHKD: <i>Stacy</i> 2018/3/26						DWG NO.:		
							APPD:						SCALE		
								1:1	1/1	A					