

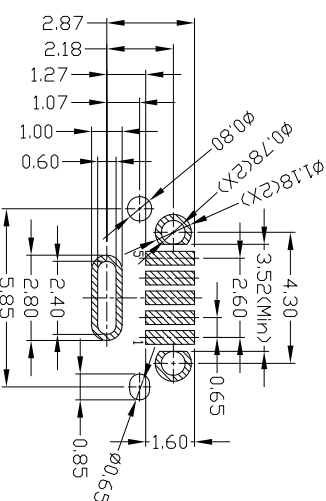
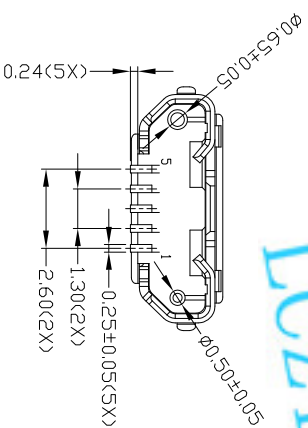


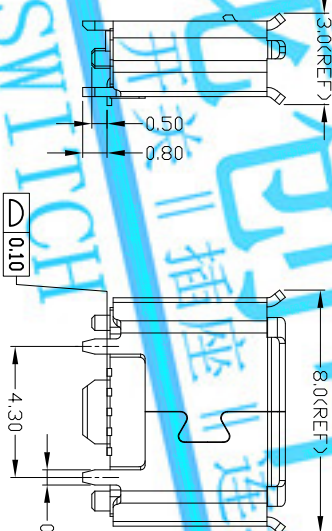


5	GND
4	ID
3	D+
2	D-
1	VBUS
PIN	NAME
PIN ASSIGNMENT	

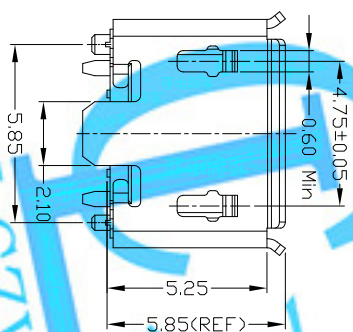

- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 0.5AMP MAX, .30V AC;
 - 2) INSULATION RESISTANCE: 100M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN
 - 5) OPERATING TEMPERATURE: -25°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 8N MIN.
 3. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED										
					UNITS		mm			
5					X.X	±0.30	X.*	±10*	MAT'L	
4	CAP	LCP+30%GF	1	UL94V-0	.XX	±0.20	.X*	±8*		
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX	±0.10	.XX*	±5*		
2	CONTACT	COPPER ALLOY	5	PLATED GOLD	SEE NOTE					FINISH
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDITECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDITECH INC.					
ND	PARTS	MATERIAL	QTY	FINISHING	Q'TY					
					SCALE SHEET REV.					CUSTOMER DRAWING
					1:1	1/1	B			