

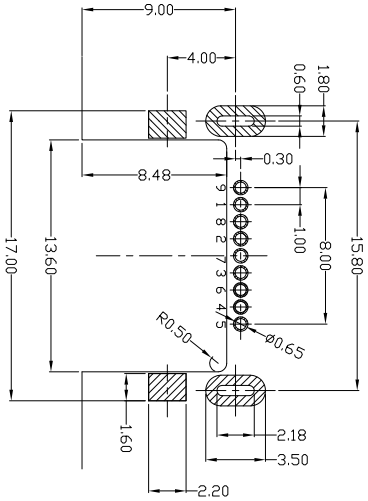




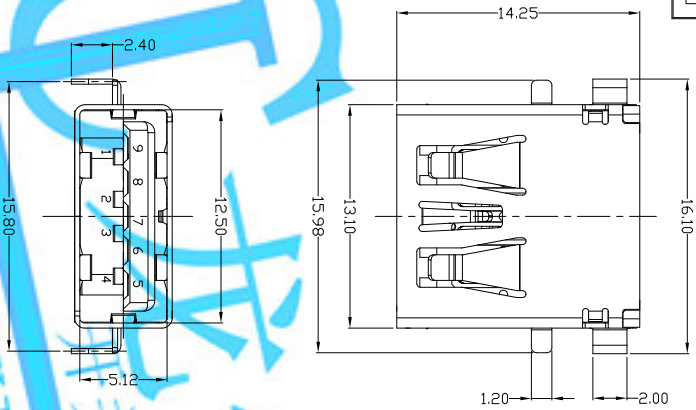


RECOMMENDED PCB LAYOUT(1.0~1.60±0.05)

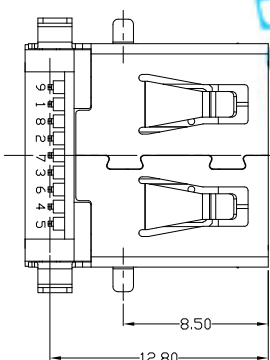

- NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING:1.5AMP,30V AC;
2) INSULATION RESISTANCE: 1000MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE:-25°C TO +85°C.
2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

4	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
							mm				
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	X: ±0.3	X: ±1°	MAT'L				
							SEE NOTE				
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX°	FINISH	TITLE: USB 3.0 AF 沉板 HS.50 DIP 无参边 盖胶			
							SEE NOTE				
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	SEE NOTE	DR: <i>gan</i> 2018/07/12	PART NO.: USAF-091N-4BLRS41		
							THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. NO. SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD: <i>gan</i> 2018/07/12	DWG NO.: AII-RS41		
							APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B	