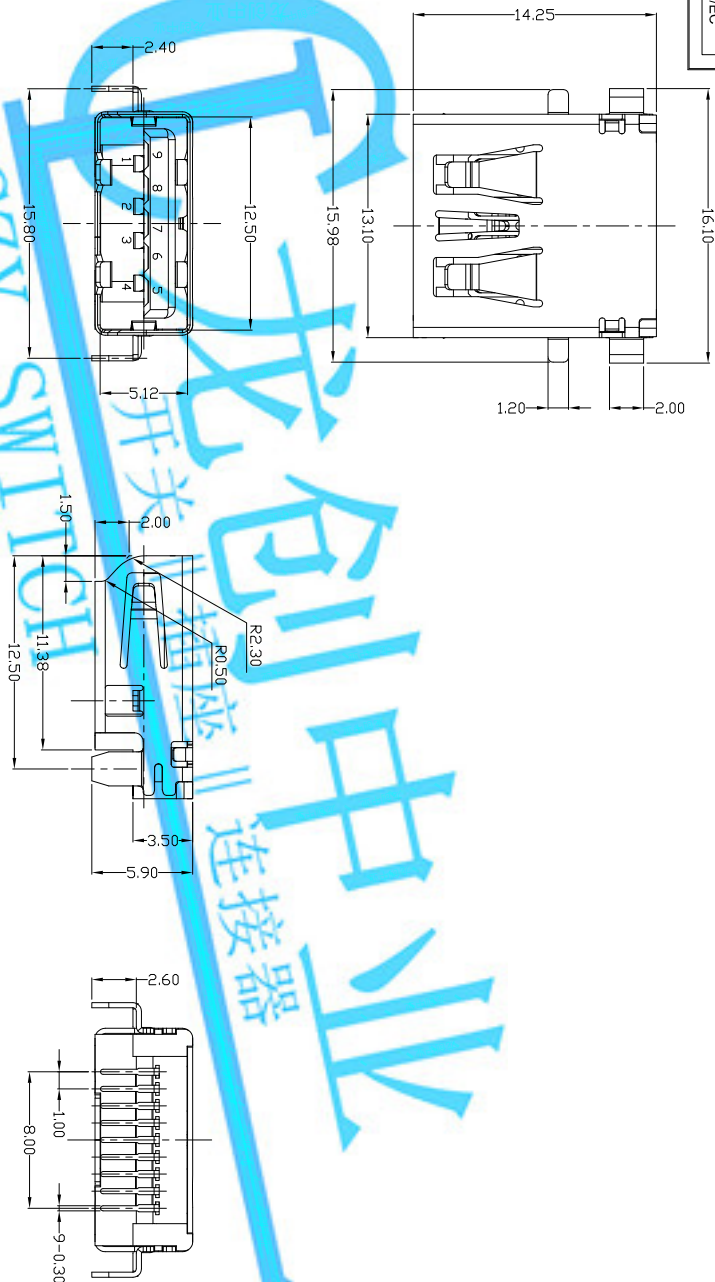


NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:1.5AMP,30V AC;

2) INSULATION RESISTANCE: 1000MΩ MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:-25°C TO +85°C.


2. Mechanical:

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

4	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X: ±.2	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
					X ±0.3	.X ±.1	MAT'L							mm	
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX	SEE NOTE								
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX	FINISH								
							SEE NOTE								
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCORDIE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF ACCORDIE INNOTECH INC.			Q'TY							
NO	PARTS	MATERIAL	QTY	FINISHING						APPD:					
								TITLE: USB 3.0 AF 沉板 HS: 50 DIP 无参边 斜口 盖胶							
								PART NO.:		USAF-091N-4BLRS42					
								DWG NO.:		A11-RS42					
								SCALE		SHEET		REV.		CUSTOMER DRAWING	
								1:1		1/1		B			