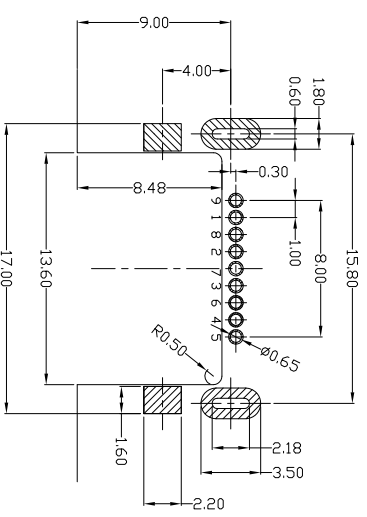


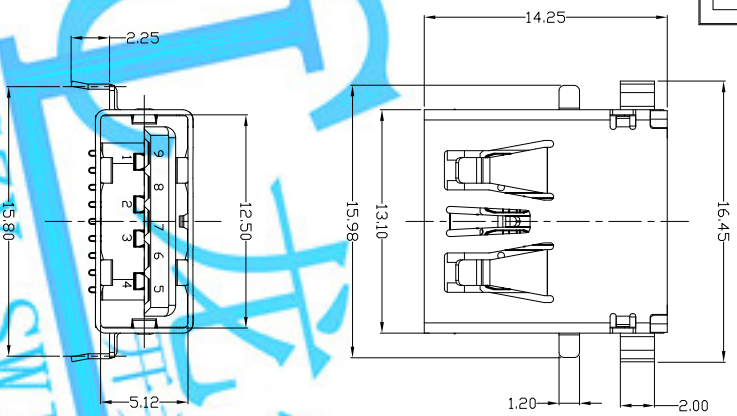


NOTES:
1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING:15AMP,30V AC,
2) INSULATION RESISTANCE: 1000MΩ MIN,
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC,
5) OPERATING TEMPERATURE:-25°C TO +85°C
- 2) Mechanical:
1) Mating Force: 35N MAX
2) Umating Force: 10N MIN.
- 3) NOTE:1.DIMENSIONS MARKED "▼" TO BE
CHECKED BY QAC & IPQC.

4.PART NO.

USAF-091N-4BLRS45

1A: 1U*
5: 4u 15u*
6: 4u 30u*

1P: 1P
2P: 2P
3P: 3P
4P: 4P

Bill of materials:

4	HOUSING	LCp+30%GF	1	UL94V-0
3	SHELL	COPPER ALLOY	1	PLATED NICKEL
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X ± 0.35	X* ± 2*
X ± 0.3	X* ± 1*
XX ± 0.25	XX*
.XXX ± 0.15	.XXX*

THESE PRECISIONS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS		mm	
MAT'L			
SEE NOTE		TITLE:	
FINISH		USAF -091N-4BLRS45	
SEE NOTE		DR: <i>yes</i> 2018/07/12	
Q'TY		CHKD: <i>yes</i> 2018/07/12	
APPD:		SCALE SHEET REV.	
		1:1 1/1 B	
		CUSTOMER DRAWING	