REV.	ECN. NO.	APPD.

Pb Process Capable

RoHS Compliant 2002/95/EC

Halogen Free

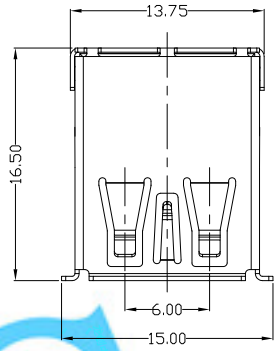



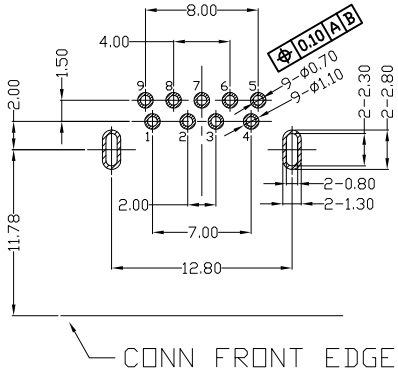

RECOMMENDED P.C.B LAYOUT(±0.05)



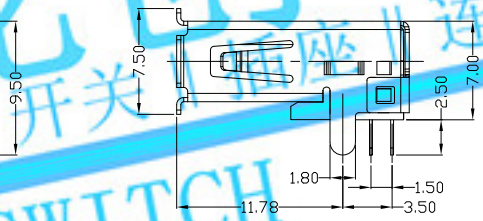



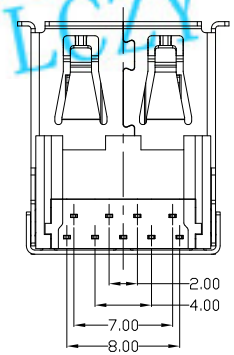

龙创中业
开关 插座 连接器
LCZY SWITCH

NOTES:

1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING:1.5AMP,30V AC;
   2) INSULATION RESISTANCE: 1000MΩ MIN;
   3) CONTACT RESISTANCE: 30mΩ MAX;
   4) WITHSTANDING VOLTAGE: 500V AC;
   5) OPERATING TEMPERATURE:-55°C TO +105°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-091N-4BLRS46-H

W:WHITE
B:BLACK
BL:BLUE

1:Au 1U"
5:Au 15u"
6:Au 30U"

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	HOUSING	LCP+30%GF HF (Halogen Free)	1	UL94V-0
4	COVER	LCP+30%GF HF (Halogen Free)	1	UL94V-0
3	SHELL	COPPER ALLOY	1	PLATED NICKEL
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN

X. ±0.35	X.° ±2°
.X ±0.3	.X° ±1°
.XX ±0.25	.XX°
.XXX ±0.15	.XXX°

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC .AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: USB 3.0 AF 90度 DIP 脚距12.80 卷边 蓝胶 无卤

PART NO.: USAF-091N-4BLRS46-H

DR: gan 2018/07/12

DWG NO.: AII-RS46-H

CHKD: gan 2018/07/12

APPD:

SCALE	SHEET	REV.	
1:1	1/1	B	CUSTOMER DRAWING