

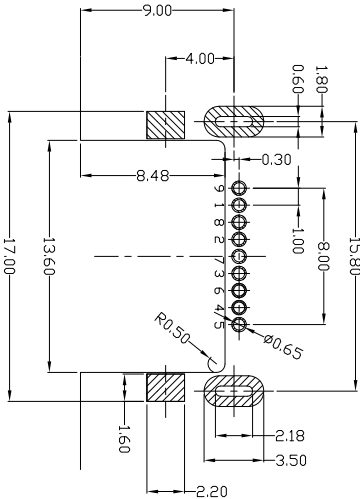


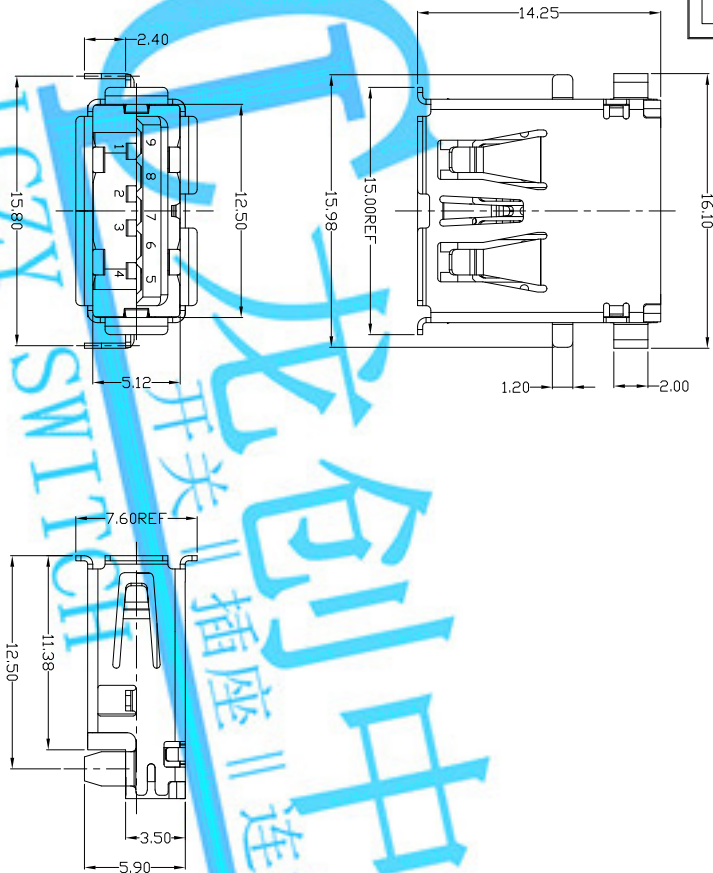

RECOMMENDED PCB LAYOUT(1.0~1.60±0.05)

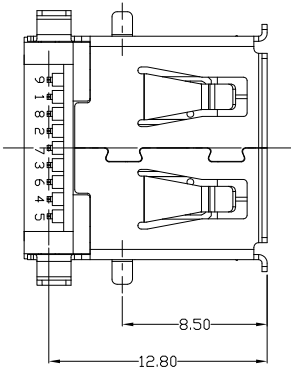

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING:1.5AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE:-25°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-091N-4BLRS47

14u 1U*
54u 15u*
64u 30u*

W:WHITE
B:BLACK
BL:BLUE

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

4	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X: ±2°	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1°	MAT'L	SEE NOTE	TITLE:	USB 3.0 AF 沉板 H3.50 DIP 卷边带	PART NO.:	USAF-091N-4BLRS47
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX°	FINISH	SEE NOTE	DR:	gan 2018/07/12	DWG NO.:	ALL-RS47
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	SEE NOTE	Q'TY	CHKD:	gan 2018/07/12	SCALE	SHEET 1/1
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. NO. SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				APPD:	gan 2018/07/12	REV.	CUSTOMER DRAWING