

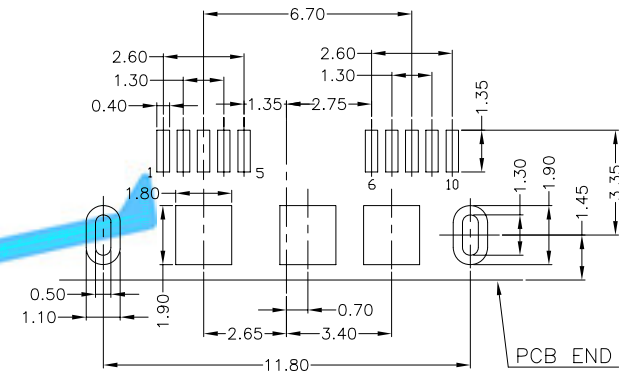
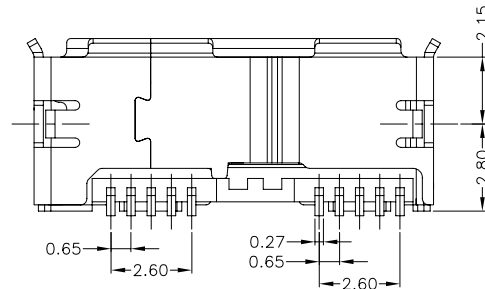


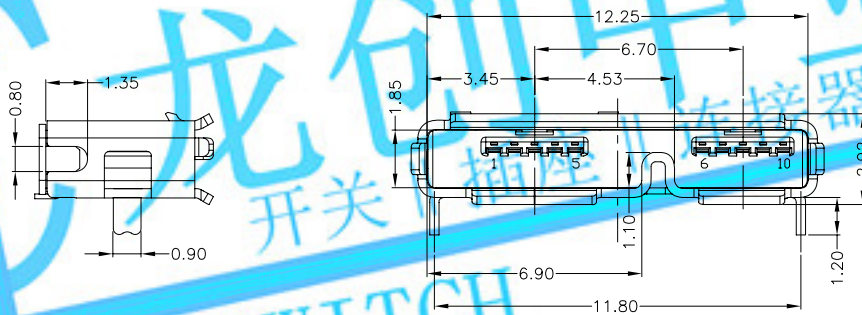

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell	Shield

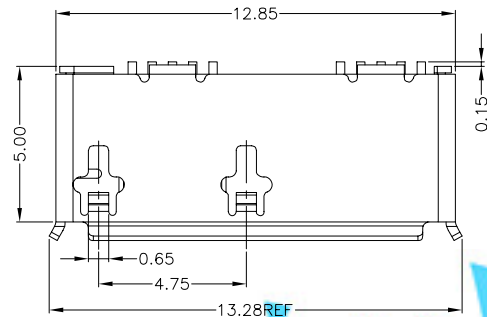

RECOMMENDED PCB LAYOUT

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP, 30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -40°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 8N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUZF-105N-4BHT02

1: Au 1U"	1: PBT
5: Au 15U"	2: PA6T
6: Au 30U"	3: PA9T
	4: LCP

Bill of materials:

3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
2	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X.* ±1*	MAT'L	SEE NOTE	TITLE: MICRO USB3.0 AB FEMALE SMT (DIP SHELL)		PART NO.: MUZF-105N-4BHT02			
					.XX ±0.25	.XX*			DR: <i>gan</i> 2016/8/30		DWG NO.: AII-HT02			
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	SEE NOTE	CHKD: <i>gan</i> 2016/8/30		SCALE			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD:	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B		