

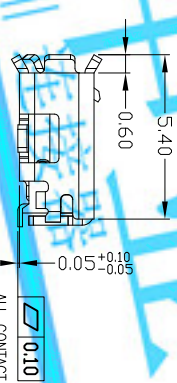


PIN NUMBER	SIGNAL NAME
1	V-BUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell Shield	

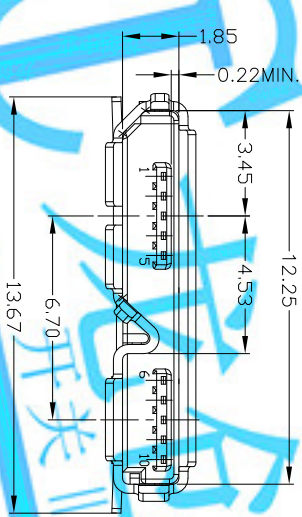


ALL CONTACT AND SHELL SOLDER PEG

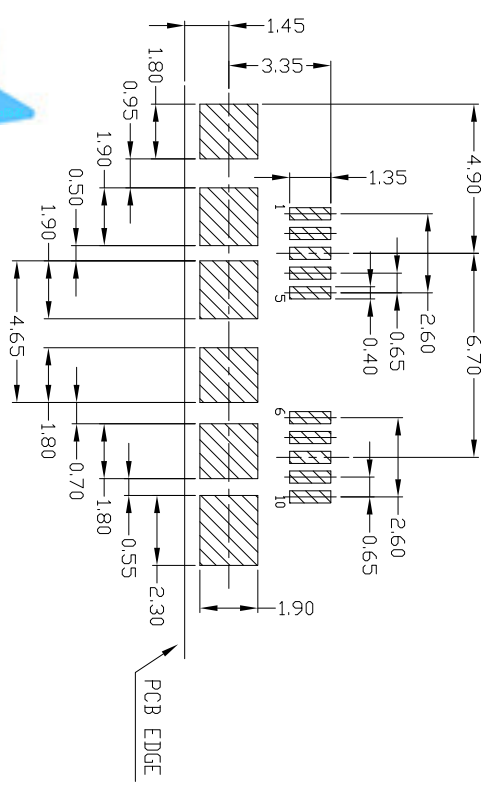

RECOMMENDED P.C.B LAYOUT

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-40°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE: MICRO USB 3.0 B TYPE F SWT型			PART NO.: MUYF-10* N-4BH W00		DWG NO.: A11-HW00				
DR: <i>gan</i> 2017/08/06			CHKD: <i>gan</i> 2017/08/06						
APPD:			SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING						
UNITS mm		MAT'L		SEE NOTE					
X. ±0.35		X. ±2°		FINISH					
.X ±0.3		.X° ±1°		SEE NOTE					
.XX ±0.25		.XX°		MICRO USB 3.0 B TYPE F SWT型					
.XXX ±0.15		.XXX°		MUYF-10* N-4BH W00					
SEE NOTE		SEE NOTE		A11-HW00					
Q'TY		Q'TY		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
				SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
ND		PARTS		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
TERMINAL		COPPER ALLOY		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
SHELL		STAINLESS STEEL		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
HOUSING		LCP+30%GF		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
1		10		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					
3		1		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING					