

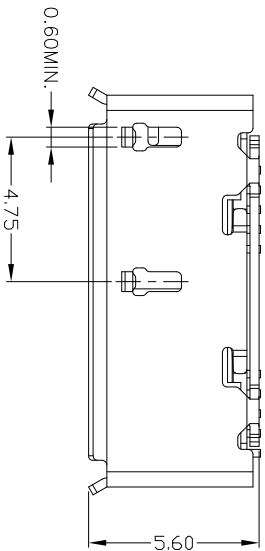




REV	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	-----	-------------	------	---------	------



PIN NUMBER	SIGNAL NAME
1	V-BUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell	Shield

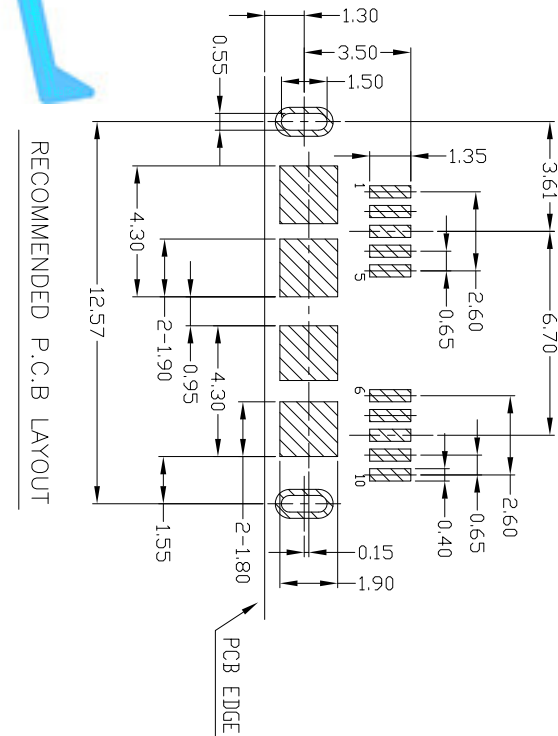


RECOMMENDED P.C.B LAYOUT

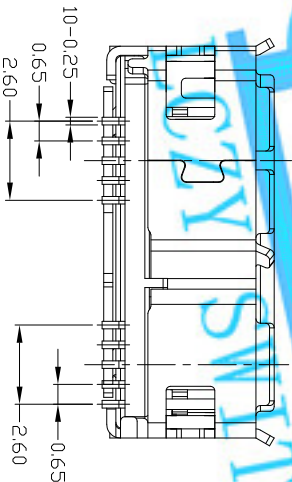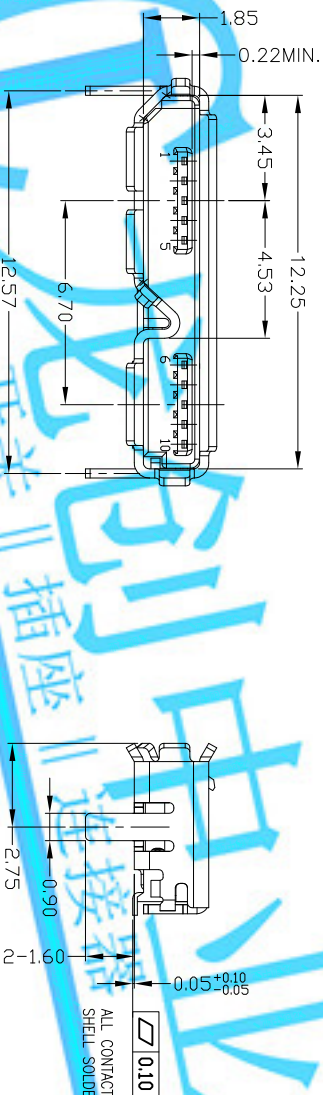

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-40°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X: ±0.35	X: ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
					X ±0.3	X: ±1°	MAT'L					
							SEE NOTE					
							FINISH					
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX°	SEE NOTE	TITLE: MICRO USB 3.0 B TYPE F DIP SHELL脚长1.60MM脚距12.57MM	PART NO.: MUYF-10*N-4BHW04			
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	SEE NOTE	DR: <i>yan</i> 2017/08/06	DWG NO.: A11-HW04			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			CHKD: <i>yan</i> 2017/08/06				
ND	PARTS	MATERIAL	QTY	FINISHING			Q'TY	APPD:	SCALE SHEET 1:1	REV. 1/1	B	CUSTOMER DRAWING