

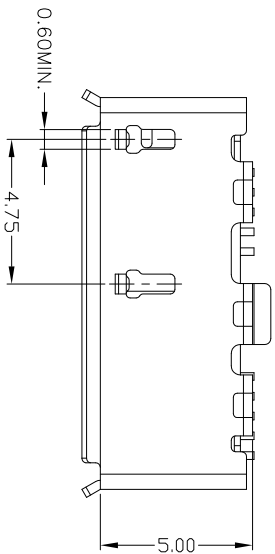

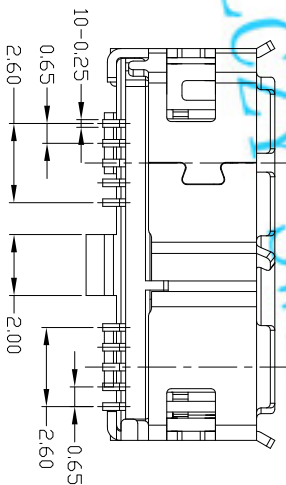


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

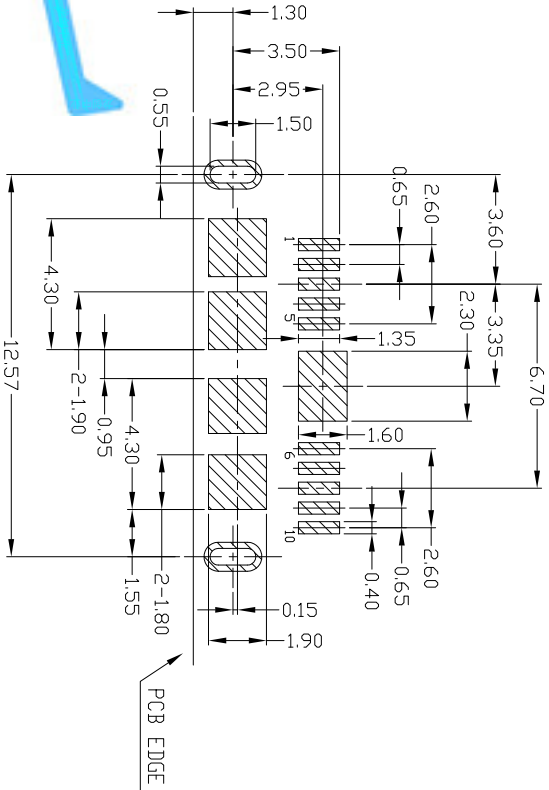


PIN NUMBER	SIGNAL NAME
1	V/BUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell	Shield

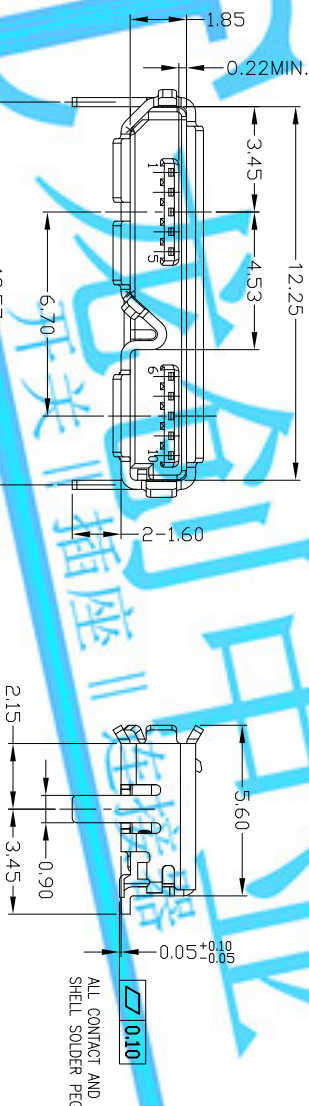

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-40°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN

X: ±0.35	X': ±2'	UNITS
X ±0.3	X' ±1'	MAT'L
.XX ±0.25	.XX'	SEE NOTE
.XXX ±0.15	.XXX'	FINISH
SEE NOTE		
Q'TY		

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: MICRO USB 3.0 B TYPE F 带SMT型加强脚 脚长1.60mm脚距12.57mm		PART NO.: MUYF-10*N-4BHW07	
DR: <i>yan</i> 2017/08/06		DWG NO.: A11-HW07	
CHKD: <i>yan</i> 2017/08/06		SCALE SHEET REV. B	
APPD:		CUSTOMER DRAWING	