
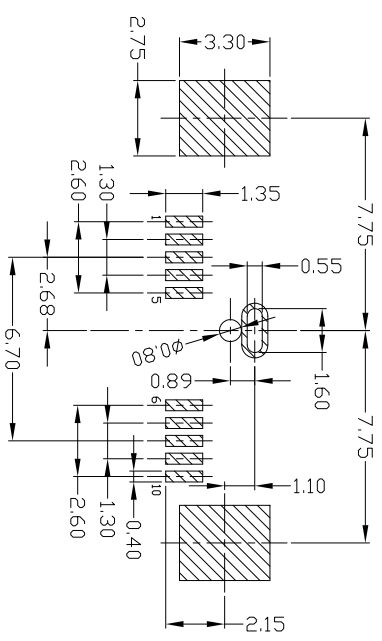
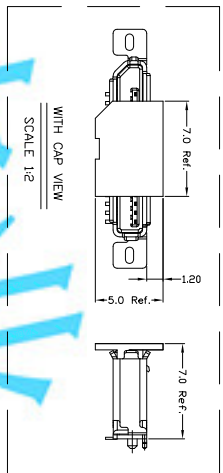


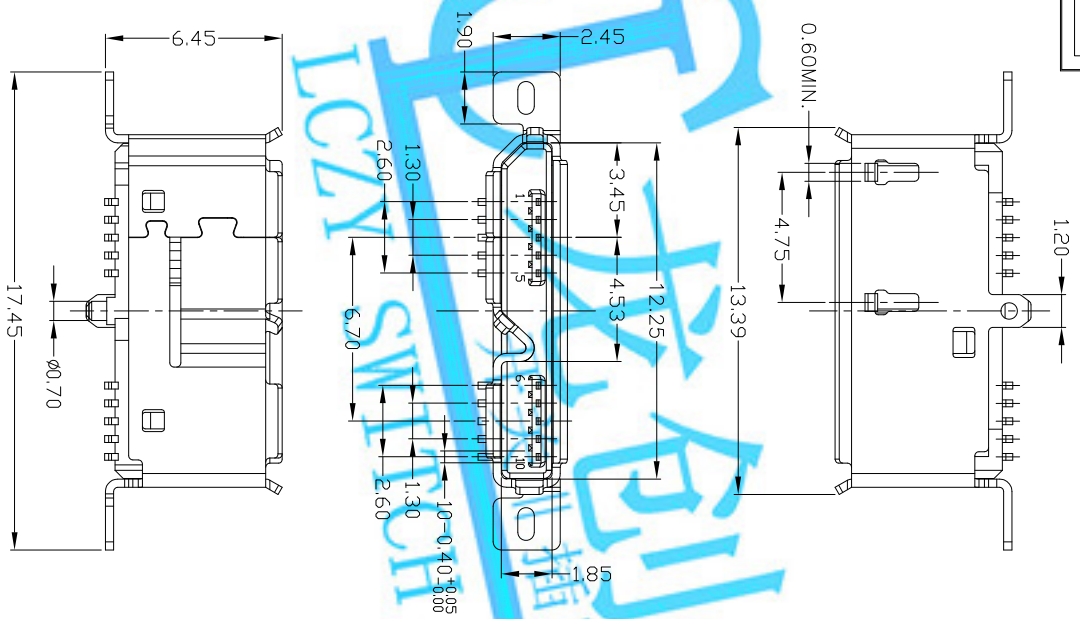

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell Shield	

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-40°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

MUYF-10*N-4BQW00-C

14u 10"
5Au 15u"
6Au 30u"

WHITE
BLACK
BIBLACK
2045T
3049T
4LCP

LONGCHUANG ZHONGYE (HK)CO.,LIMITED												
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL								
2	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X': ±2°	UNITS					
					.X ±0.3	.X' ±1°	MAT'L					
					.XX ±0.25	.XX°	SEE NOTE					
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XXX ±0.15	.XXX°	FINISH					
					SEE NOTE		Q'TY					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
ND	PARTS	MATERIAL	QTY	FINISHING	TITLE: MICRO USB 3.0 B TYPE F 180度直立式 短柄插5 圆形柱子			DR: <i>yan</i> 2017/08/06	APPD:			
					PART NO.: MUYF-10*N-4BQW00-C		DWG NO.: A11-QW00-C		SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B	

REV	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	-----	-------------	------	---------	------