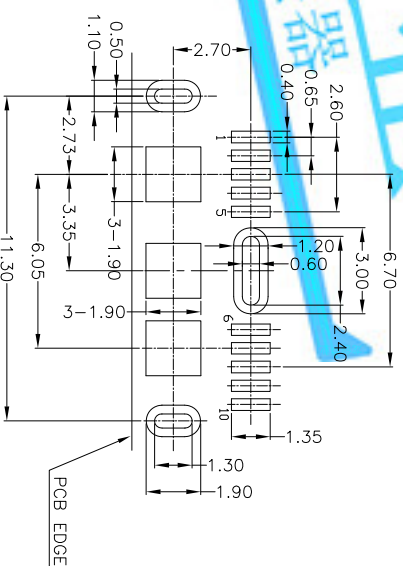
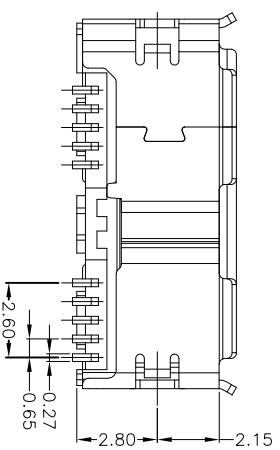
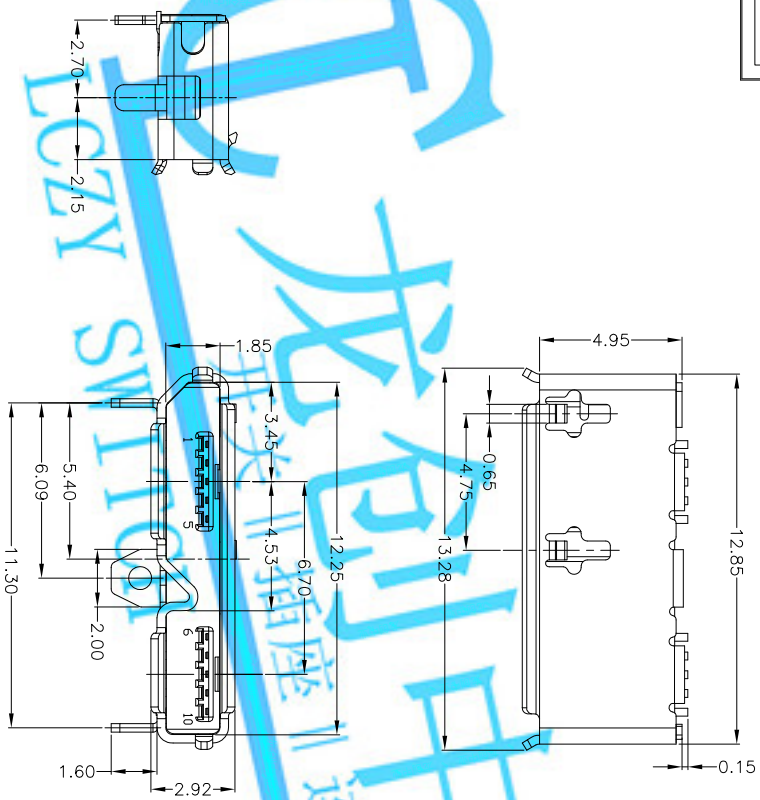


PIN NUMBER	SIGNAL NAME
1	V _{BUS}
2	D-
3	D+
4	ID
5	GND
6	MCB_ _{SS1X} -
7	MCB_ _{SS1X} +
8	GND_DRAIN
9	MCB_ _{SSRX} -
10	MCB_ _{SSRX} +
Shield	Shield

RECOMMENDED P.C.B LAYOUT

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING:1AMP, 30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-40°C TO +85°C.

4. PART NO.

MUYF-105N-4BHT06

1: Au 1U" —
5: Au 15U"
6: Au 30U"
— W: WHITE
— B: BLACK
1: PBT

1:PgT
2:PA6T
3:PA9T
4:LCp

Bill of materials:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:			PART NO.:						
Micro USB 3.0 B SMT (三脚定位IDP SHEET)11.30mm			MUYF-105N-4BHT06						
DR: <i>yan</i> 2016/9/10			DWG NO.: AII-HT106						
CHKD: <i>yan</i> 2016/9/10			SCALE SHEET REV.						
APPD:			1:1 B CUSTOMER DRAWING						
AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF INNTECH INC.									
UNITS		mm							
X: ±0.35		X: ±2°							
.X ±0.3		.X° ±1°							
.XX ±0.25		.XX°							
.XXX ±0.15		.XXX°							
FINISH		SEE NOTE							
SEE NOTE		SEE NOTE							
Q'TY		Q'TY							
PARTS		PARTS							
TERMINAL		TERMINAL							
HIDUSING		HIDUSING							
SHELL		SHELL							
E		E							

REV	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	-----	-------------	------	---------	------