


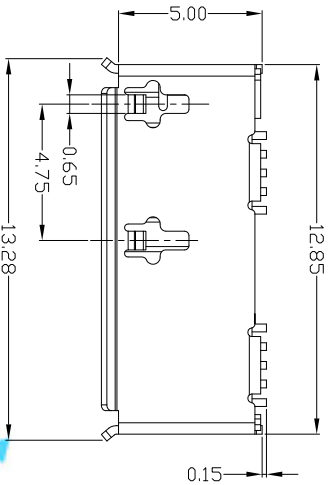


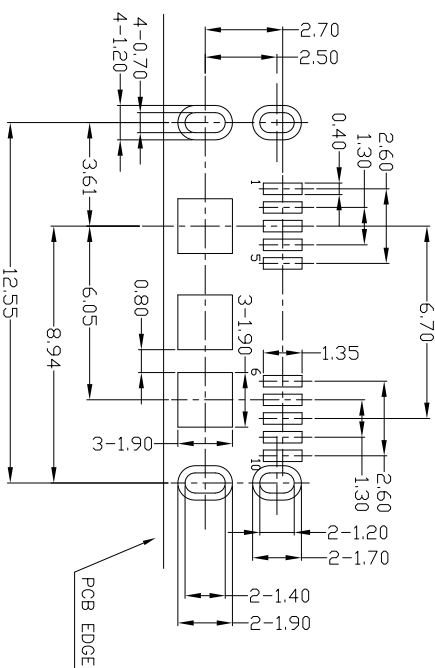

PIN NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell	Shield

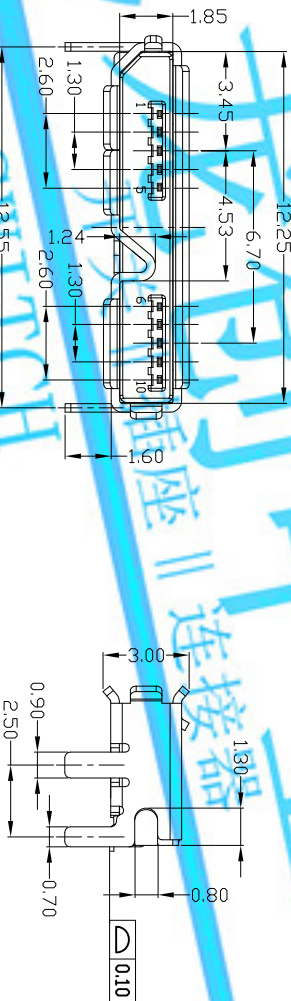

RECOMMENDED P.C.B LAYOUT

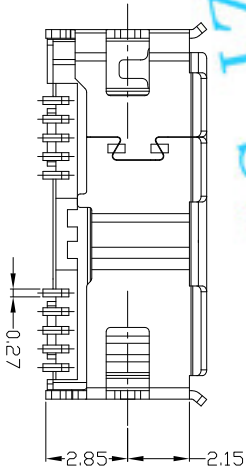

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING:1AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-40°C TO +85°C.

4. PART NO.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "V" TO BE CHECKED BY Q.C & IPQC.

MUYF-105N-4BHT010
1.5Au 1U"
5.0Au 15U"
6.0Au 30U"
w/WHITE
BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2°	UNITS	mm
X ±0.3	X' ±1°	MAT'L	SEE NOTE
.XX ±0.25	.XX'	FINISH	SEE NOTE
.XXX ±0.15	.XXX'	Q'TY	SEE NOTE

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: MICRO USB 3.0 B FEMALE SMT TYPE(OIP SHIELD) 12.55 4脚 翻盖1.6		PART NO.:	
DR: <i>yan</i> 2018/1/20		MUYF-105N-4BHT010	
CHKD: <i>yan</i> 2018/1/20		DWG NO.:	
APPD: <i>yan</i> 2018/1/20		A11-HT010	
SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	