

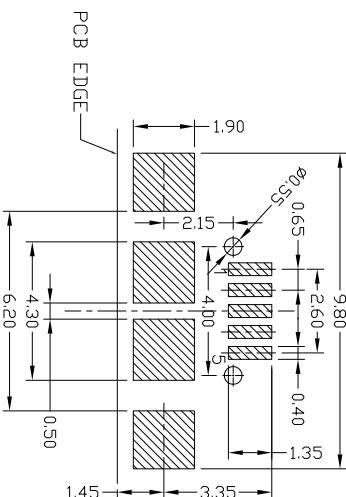


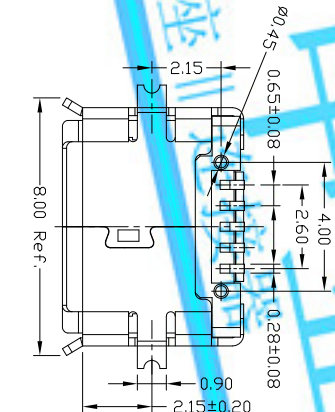
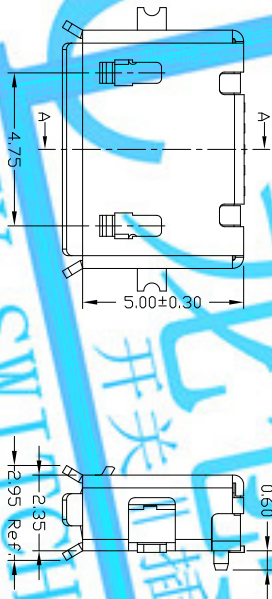



0.10



RECOMMENDED PCB LAYOUT

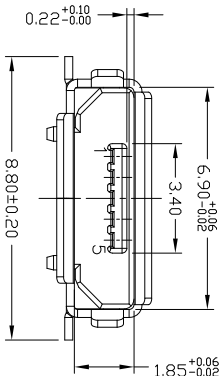

- NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX ,30V AC;
2) INSULATION RESISTANCE: 100MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5) OPERATING TEMPERATURE:-30°C TO +80°C.
2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



LONGCHUANG ZHONGYE (HK)CO.,LIMITED										
3		SHELL	COPPER ALLOY	1	PLATED TIN	X: ±0.35	X': ±2"	UNITS	mm	
						.X ±0.30	.X' ±1"	MAT'L		
2		HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX'	SEE NOTE	FINISH	
						.XXX ±0.15	.XXX'	SEE NOTE		
1		TERMINAL	COPPER ALLOY	5	PLATED GOLD	THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC				
ND		PARTS	MATERIAL	QTY	FINISHING		Q'TY			
						DR: Ricky 2018/8/30	PART NO.:		MUFZ-05XT-4BHUA023	
						CHKD: Ricky 2018/8/30	DWG NO.:			
						APPD:	SCALE SHEET REV. A			
								5:1	1/1	CUSTOMER DRAWING