


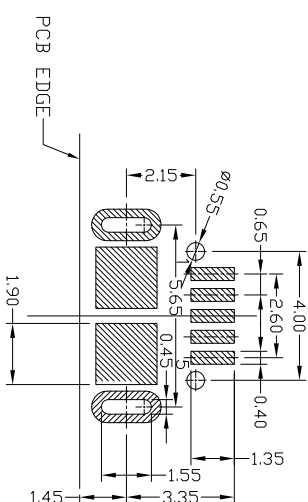







RECOMMENDED PCB LAYOUT

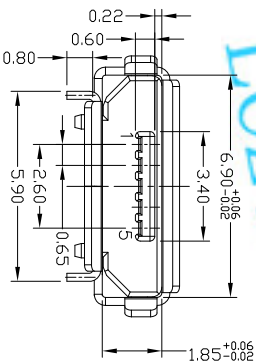

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE:-30°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

3	SHELL	COPPER ALLOY	1	PLATED TIN	X: ±0.35	X' ±2"	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
					X: ±0.30	X' ±1"	MAT'L						
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX'	SEE NOTE						
					.XXX ±0.15	.XXX'	FINISH						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC			Q'TY	DR: Ricky 2018/9/3	DWG NO.: A11-HUA041			
							SEE NOTE						
ND	PARTS	MATERIAL	QTY	FINISHING					CHKD: Ricky 2018/9/3	SCALE	SHEET	REV.	CUSTOMER
								APPD:	5:1	1/1	A	DRAWING	