



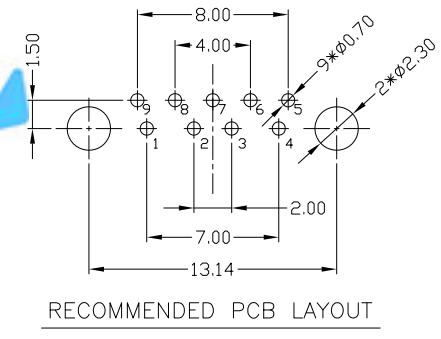

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

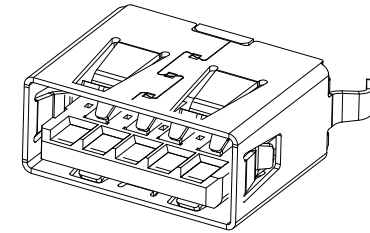

NOTES:

1. ELECTRICAL:

- 1) CURRENT RATING: 1.5 AMP;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 100V AC;
- 5) OPERATING TEMPERATURE: -20°C ~ +60°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-3BLPC13

1Au 1U'
5Au 15U'
6Au 30U'

W:WHITE
B:BLACK
BL:BLUE
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

					X. ±0.35	X.* ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED													
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1°	MAT'L	TITLE: USB 3.0 AF 180度DIP H=11.1 无卷边		PART NO.: USAF-09*N-3BLPC13											
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE														
1	HOUSING	PA9T/LCP/PBT	1	UL94V-0	.XXX ±0.15	.XXX*	FINISH	DR: <i>gan</i> 2016/12/31		DWG NO.: AII-PC13											
						SEE NOTE															
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY	CHKD: <i>gan</i> 2016/12/31		SCALE 1:1			SHEET 1/1			REV. B			CUSTOMER DRAWING		
NO	PARTS	MATERIAL	QTY	FINISHING																	