

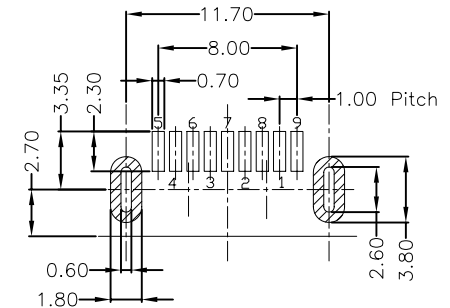
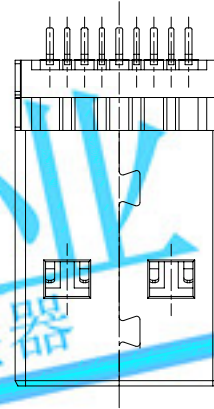



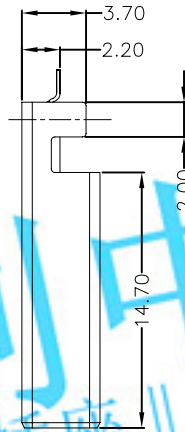


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

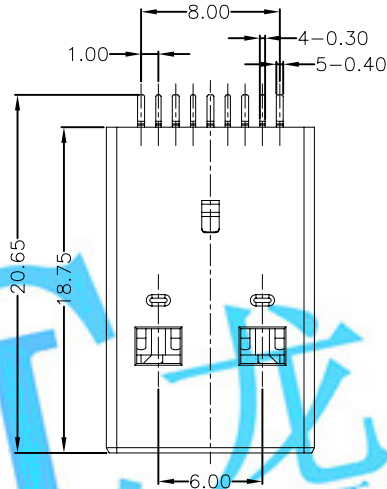

RECOMMENDED PCB LAYOUT



NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -40°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX.
- 2) Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-095N-4BLVS16

1: Au 1U"
5: Au 15U"
6: Au 30U"
W: WHITE
B: BLACK
BL: BLUE
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

					X. ±0.35	X.* ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
							mm						
3	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1°	SEE NOTE	MAT'L	TITLE: USB 3.0 AM 沉板SMT 无柱		PART NO.: USAM-095N-4BLVS16		
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX*							
					.XXX ±0.15	.XXX*	FINISH	SEE NOTE	DR: <i>gan</i> 2015/4/6	DWG NO.: AII-VS16			
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC								
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD: <i>gan</i> 2015/4/6	SCALE SHEET REV.				CUSTOMER DRAWING
													
								APPD:					
									1:1	1/1	B		