


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

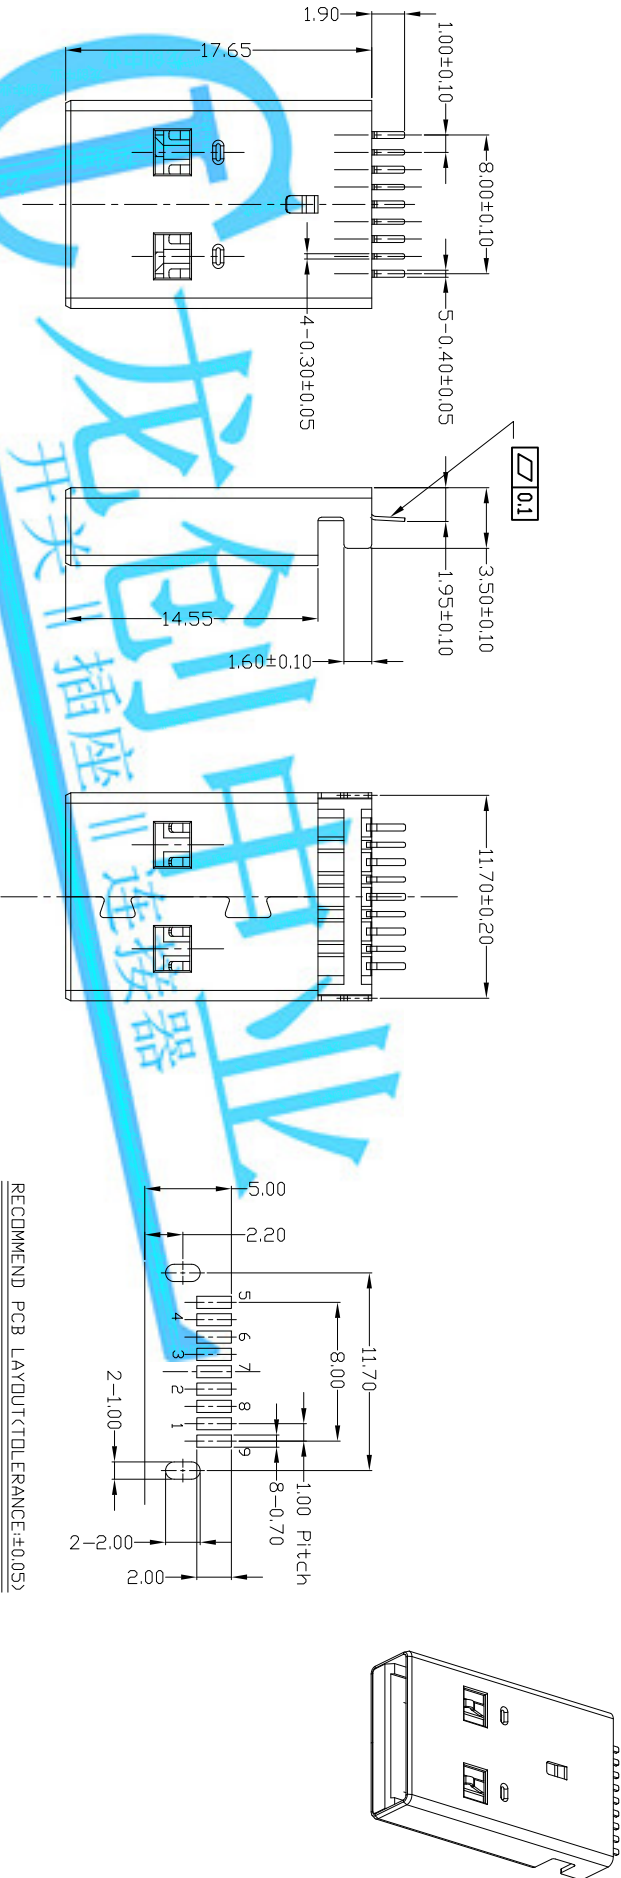

NOTES:
1.ELECTRICAL:
1>VOLTAGE CURRENT RATING:1.5AMP,30V AC;
2>INSULATION RESISTANCE: 100MΩ MIN;
3>CONTACT RESISTANCE: 30mΩ MAX;
4>WITHSTANDING VOLTAGE: 500V AC;
5>OPERATING TEMPERATURE:-55°C TO +85°C.
2.Mechanical:
1>Mating Force: 35N MAX
2>Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

RECOMMEND PCB LAYOUT(TOLERANCE:±0.05)

4. PART NO.
- USAM-09***N**-4BL VU34
- 11u 1u*
5Au 15u*
6Au 30u*
- 1PBT
2FR51
3FR51
4LCP
- 1VWHITE
2BLACK
3BLUE

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	SEE NOTE	SEE NOTE	DR: <i>Rocky</i> 2019/2/15	DWG NO.: A11-VU34	1:1	1/1	B	CUSTOMER DRAWING
2	SHELL	SPCC	1	UL94V-0	FINISH	SEE NOTE	DR: <i>Rocky</i> 2019/2/15					
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	SEE NOTE	SEE NOTE	DR: <i>Rocky</i> 2019/2/15					
4	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
5							USB AM 3.0 I=17.6MM 沉板1.9MM 无柱(外壳脚长3.50MM) 锡脚1.9	USAM-09XN-4BL VU34				
6							CHKD: <i>Rocky</i> 2019/2/15					
7							APPD:					