


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

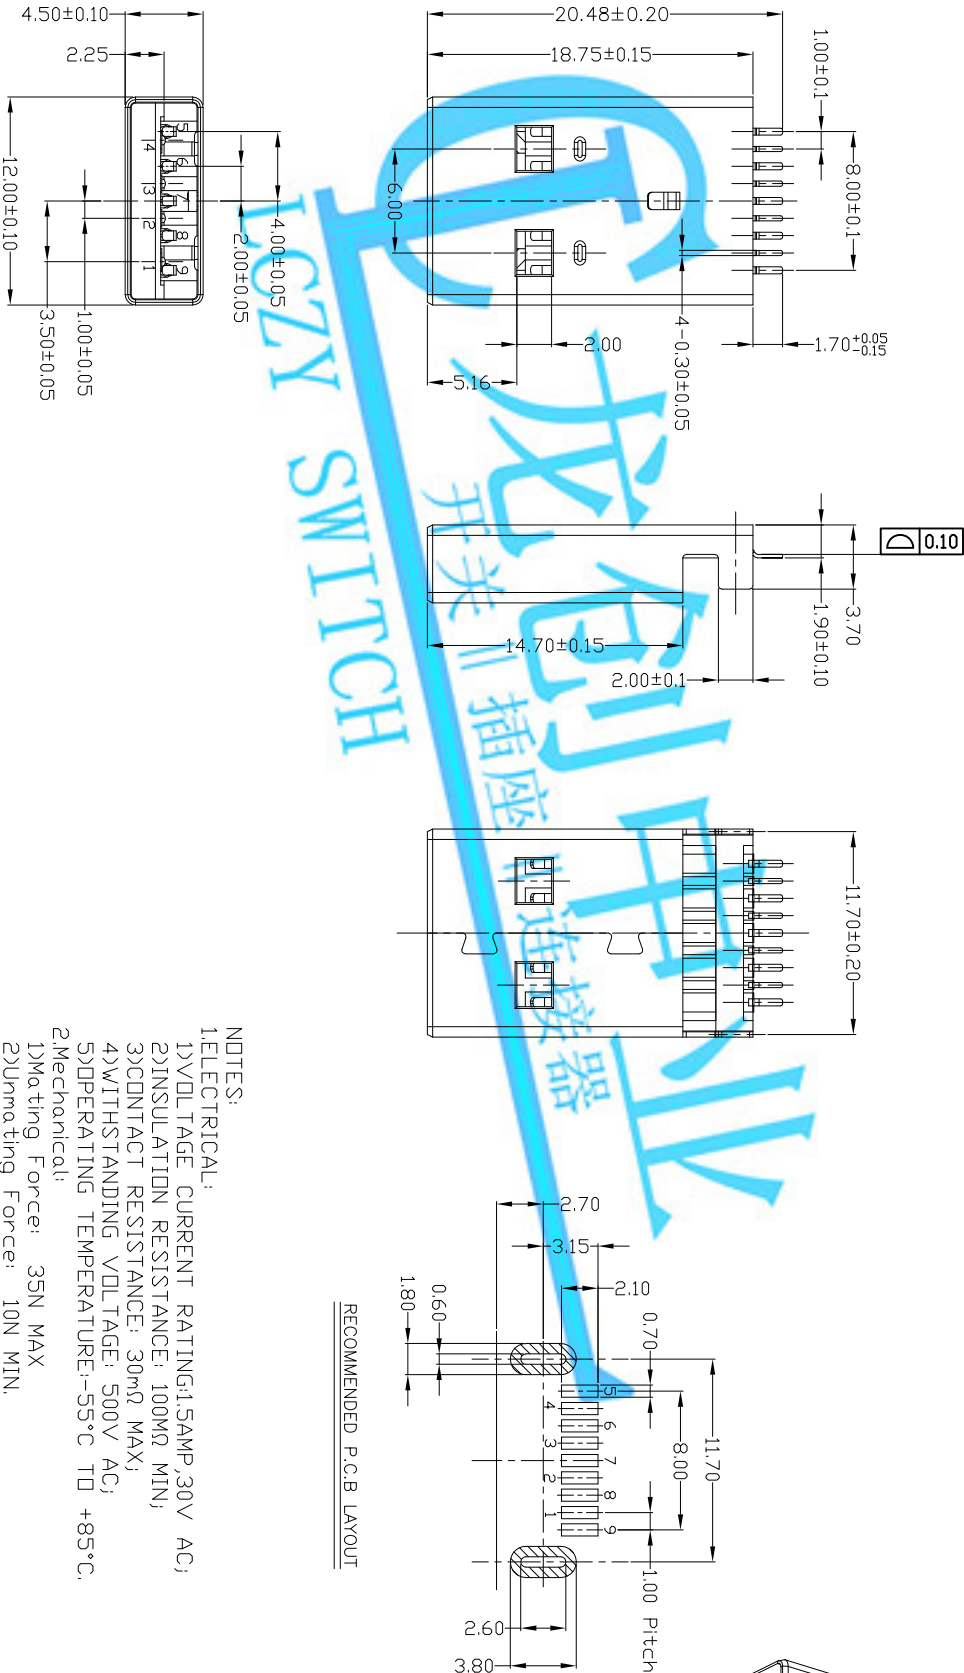

RECOMMENDED P.C.B LAYOUT

- NOTES:
- 1ELECTRICAL:
- 1)VOLTAGE CURRENT RATING:1.5AMP,30V AC;
 - 2)INSULATION RESISTANCE: 100MΩ MIN;
 - 3)CONTACT RESISTANCE: 30mΩ MAX;
 - 4)WITHSTANDING VOLTAGE: 500V AC;
 - 5)OPERATING TEMPERATURE:-55°C TD +85°C.
- 2Mechanical:
- 1)Mating Force: 35N MAX
 - 2)Umating Force: 10N MIN.
- 3DIMENSIONS MARKED "▼"
TD BE CHECKED BY Q.C & IPQC.

4. PART NO.
- USAM-09***N**-4BL VU30
- 11AU 11U*
5AU 15U*
6AU 30U*
 - 1PBT
2PBT
3PBT
4LCP
 - 1VWHITE
2BLACK
3BLUE

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	UNITS	mm	TITLE: USB AM 3.0 I=18.7MM 沉板1.9MM 无柱(外壳脚长3.70MM) 锡脚1.7
2	SHELL	SPCC	1	UL94V-0	FINISH	SEE NOTE	DR: <i>Stacy</i> 2019/2/18
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	Q'TY	SEE NOTE	CHKD: <i>Stacy</i> 2019/2/18
ND	PARTS	MATERIAL	QTY	FINISHING	APPD:	SCALE SHEET 1/1	DWG NO.: A11-VU30
						REV. B	CUSTOMER DRAWING