

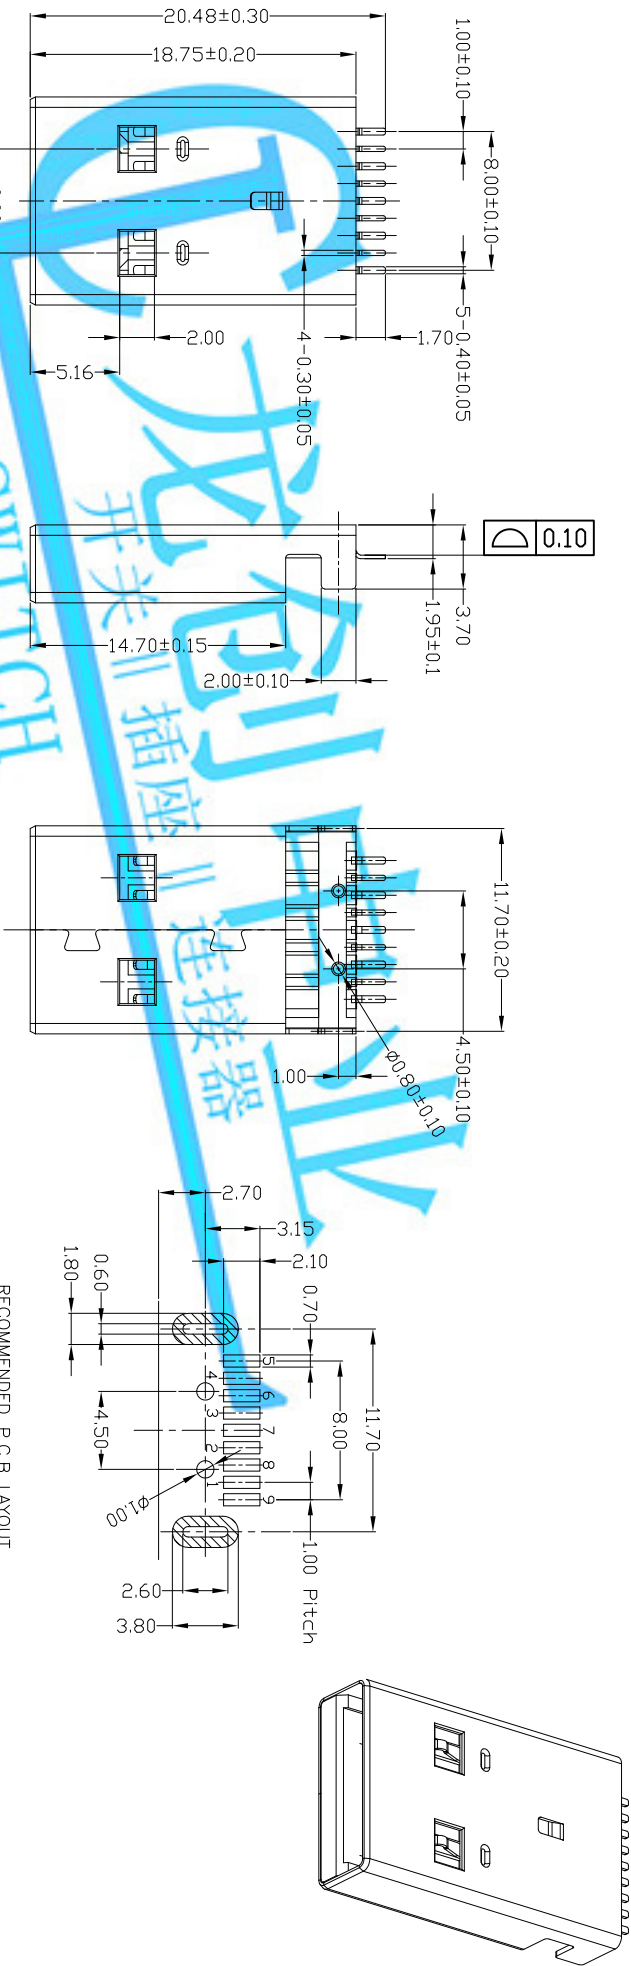


REV	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	-----	-------------	------	---------	------



RECOMMENDED P.C.B LAYOUT

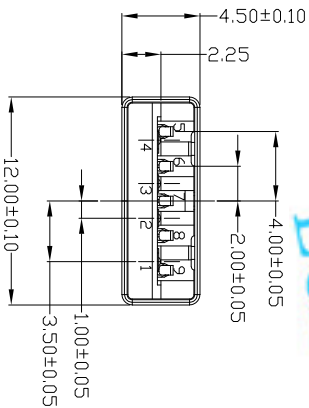

NOTES:
1.ELECTRICAL:
1>VOLTAGE CURRENT RATING:1.5AMP,30V AC;
2>INSULATION RESISTANCE: 100MΩ MIN;
3>CONTACT RESISTANCE: 30mΩ MAX;
4>WITHSTANDING VOLTAGE: 500V AC;
5>OPERATING TEMPERATURE:-55°C TD +85°C.
2.Mechanical:
1>Mating Force: 35N MAX
2>Umating Force: 10N MIN.
3.DIMENSIONS MARKED "▼"
TD BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAM-09*1N-4BL VU31
11u 11u*
5Au 15u*
6Au 30u*
1PBT
2FR51
3FR51
4LCP
V-WHITE
B-BLACK
BL-BLUE

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	SEE NOTE		USB AM 3.0 I=18.7MM 沉板1.9MM 有柱(外壳脚长3.70MM) 锡脚1.7	USAM-09XN-4BL VU31	1:1	1/1	B	DRAWING
2	SHELL	SPCC	1	UL94V-0	FINISH		DR: Jacky 2019/2/18					
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	SEE NOTE		CHKD: Jacky 2019/2/18					
4	PARTS	MATERIAL	QTY	FINISHING	APPD:							