
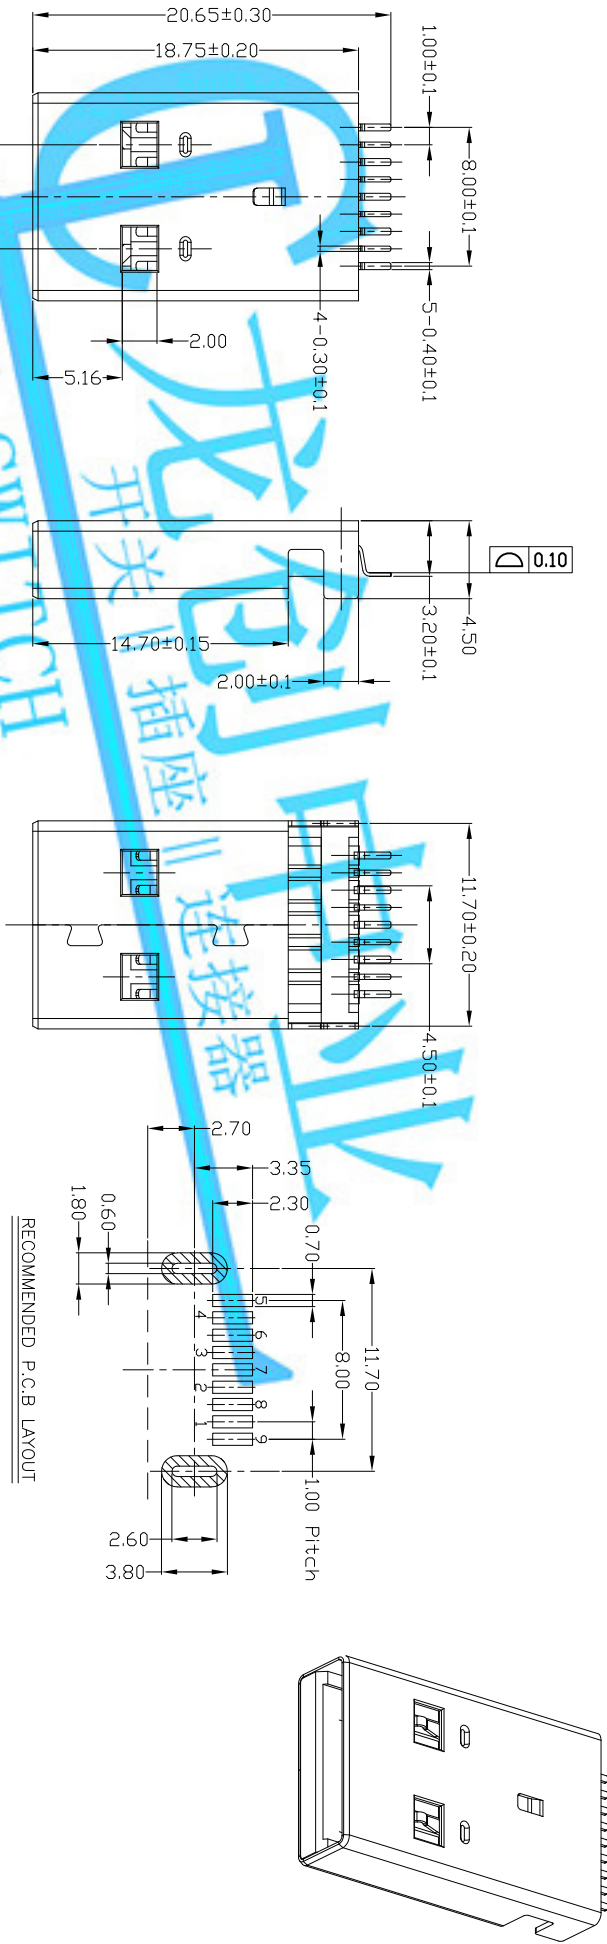


REV	LTR	DESCRIPTION	DATE	REVISER	APPD



RECOMMENDED P.C.B LAYOUT

NOTES:

1.ELECTRICAL:

- 1)VOL TAGE CURRENT RATING:1.5AMP,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 500V AC;
- 5)OPERATING TEMPERATURE:-55°C TD +85°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Umating Force: 10N MIN.

3.DIMENSIONS MARKED "▼"

TD BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-09*1N-4BL VU38

11AU 11U*
5AU 15U*
6AU 30U*

1PBT
6PA6T
3PA6T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:	SCALE	SHEET	REV.	CUSTOMER
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	Q'TY				1:1	1/1	B	
2	SHELL	SPCC	1	UL 94V-0	SEE NOTE							
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	SEE NOTE							
4	PARTS	MATERIAL	QTY	FINISHING								