

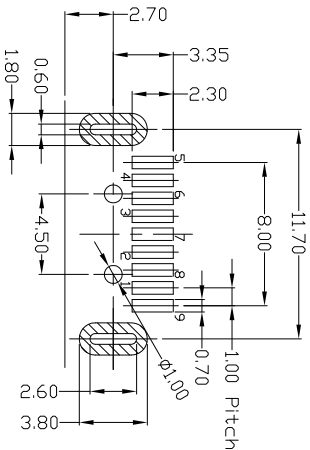
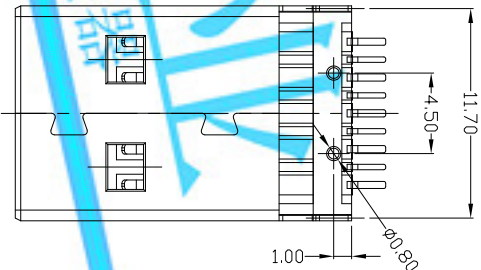
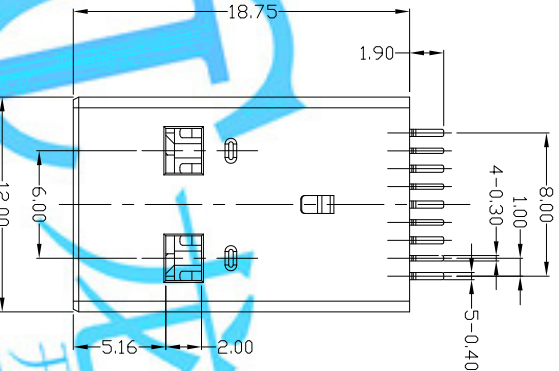


REV	LTR	DESCRIPTION	DATE	REVISER	APPD



RECOMMEND PCB LAYOUT
(TOLERANCE:±0.05)



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1.5 AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-40°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY QC & IPQC.

4.PART NO.

USAM-09***N**-4BL Vw09

1Au 1U"
5Au 15U"
6Au 30U"
W/WHITE
B/BLACK
BL/BLUE
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

					X. ±0.35	X. ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
					X ±0.3	.X' ±1°	MAT'L							
					.XX ±0.25	.XX'	SEE NOTE							
					.XXX ±0.15	.XXX'	FINISH							
3	HOUSING	LCP+30%GF	1	UL 94V-0				SEE NOTE	TITLE: USB AM 3.0 I=18.7 沉板2.2 外壳脚长 3.7 有柱					
2	SHELL	SPCC	1	PLATED NICKEL				FINISH	PART NO.: USAM-09*N-4BL VW09					
								SEE NOTE	DR: yan 2017/9/1					
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN				Q'TY	CHKD: yan 2017/9/1					
								THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	DWG NO.: A11-VW09					
NO	PARTS	MATERIAL	QTY	FINISHING					APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
											1:1	1/1	B	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED