




Pin NUMBER	SIGNAL NAME
1	V _{BUS}
2	D ⁻
3	D ⁺
4	GND
5	S ₁ CD ₁ S ₁ TX ⁻
6	S ₁ CD ₁ S ₁ TX ⁺
7	GND, DRAIN
8	S ₁ CD ₁ S ₁ SRX ⁻
9	S ₁ CD ₁ S ₁ SRX ⁺
Shell	Shield

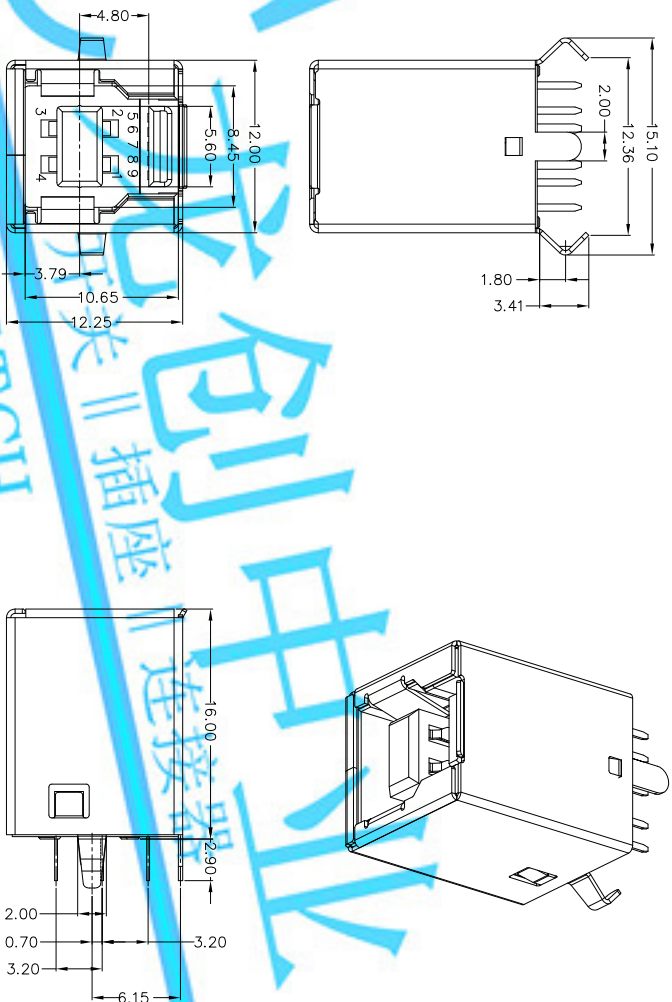

RECOMMEND P.C.B LAYOUT COMPONENT SIDE.
DEFAULT TOLERANCES: ±0.05 (PCB T=1.6mm)

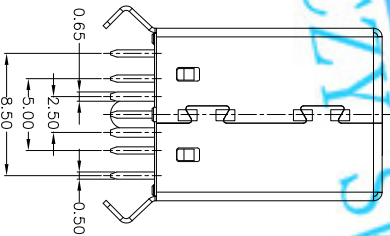

NOTES:
1. ELECTRICAL:

4. PART NO.

JSBF-09*^TN-4BLPU30^T

1A: 1U⁺
5A: 15U⁺
6A: 30U⁺

1PBT
2P: A6T
3P: A9T
4: LCP

W: WHITE
B: BLACK
BL: BLUE

5	COVER	LCP+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED TITLE: USB 3.0 BIF DIP 180度 PART NO.: USBF-09XN-4BLPU30 DWG NO.: AII-PU30 SCALE SHEET REV. 1:1 1/1 B CUSTOME DRAWING
4	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L	
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	
2	SPRING CONTACT(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	
1	FLAT CONTACT(SP)	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
ND	PARTS	MATERIAL	QTY	FINISHING	QTY			
1								
DR: Ricky 2018/11/20								
CHKD: Ricky 2018/11/20								
APPD:								