
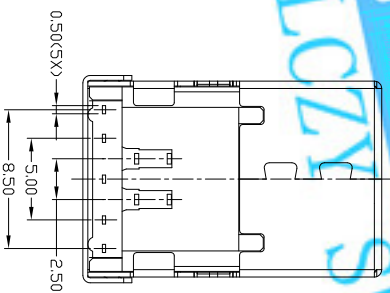
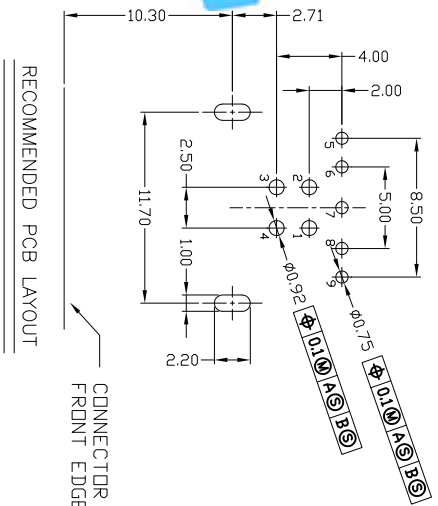
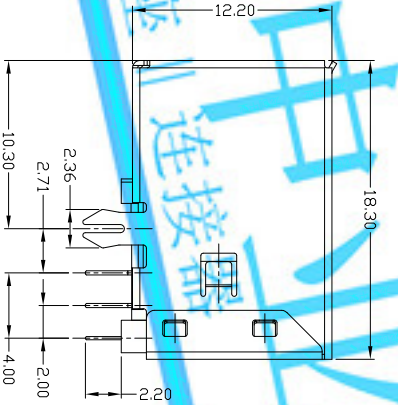


PIN NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	GND
5	STDB_SSTX-
6	STDB_SSTX+
7	GND_DRAIN
8	STDB_SSRX-
9	STDB_SSRX+
Shell	Shield

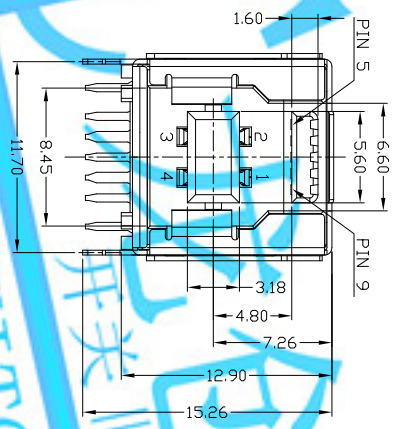

- NOTES:
1. ELECTRICAL:
- 1) CURRENT RATING:1.5 AMP;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-40°C ~ +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

USBF-09*N-4BLRC13

1Au 1U"
5Au 15U"
6Au 30U"

W/WHITE
B:BLACK
BL:BLUE

1PB1
2PA6T
3PA9T
4LCP

5	HOUSING	LCP+30%GF	1	UL94V-0	X: ±0.35	X: ±2'	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	BACK COVER	COPPER ALLOY/SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1"	MAT'L							
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE							
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH							
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE		TITLE: USB3.0 BP 90° DIP 鱼叉脚 H12.9 成品图					
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTCH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTCH INC.					DR: gyan	2017/01/09	DWG NO.:	USBF-09*W-4BLRC13	
									A11-RC13					
									CHKD: gyan	2017/01/09	SCALE	SHEET	REV.	CUSTOMER DRAWING
									APPD:		1:1	1/1	B	