

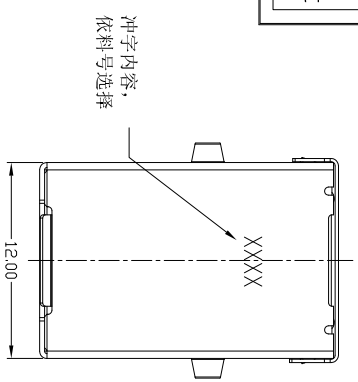


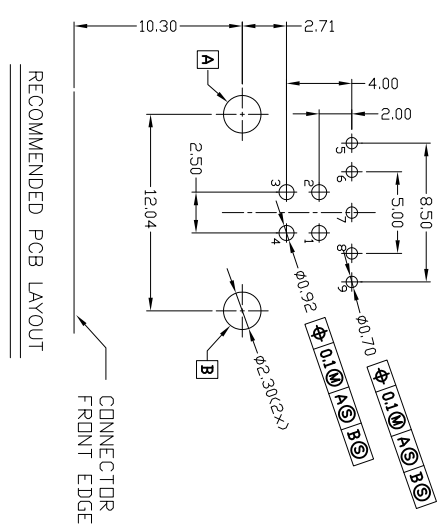

PIN NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	GND
5	STDB_SSTX-
6	STDB_SSTX+
7	GND_DRAIN
8	STDB_SSRX-
9	STDB_SSRX+
Shell	Shield

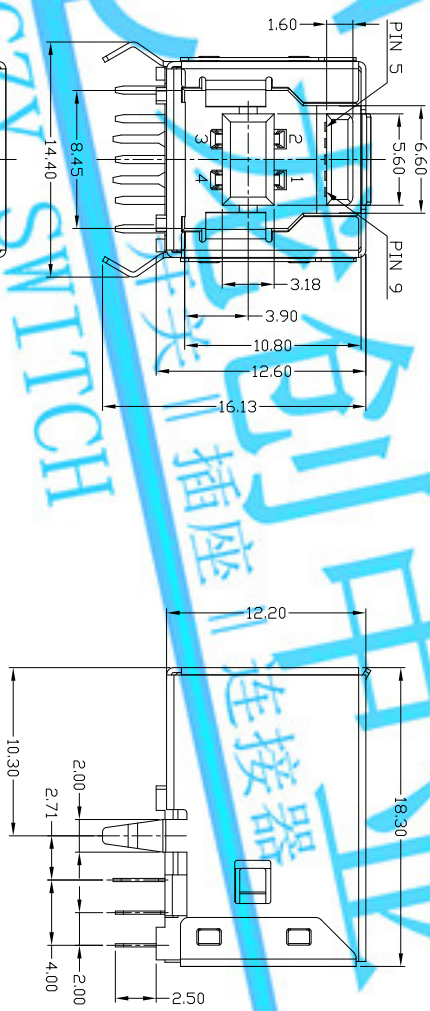


NOTES:

1. ELECTRICAL:
- 1) CURRENT RATING:1.5AMP;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-40℃ ~ +85℃.

4. PART NO.

2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
 - 3. DIMENSIONS MARKED "▼" TD BE CHECKED BY Q.C & IPQC.

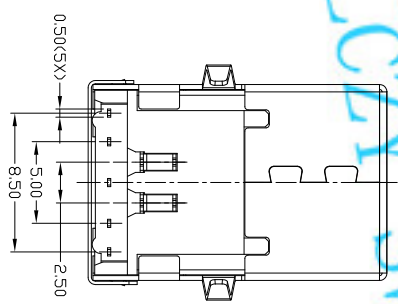

USBF-09*N-4BLRC15

1Au 10"
5Au 150"
6Au 300"

W/WHITE
B/BLACK
BL/BLUE

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

5	HOUSING	LCF+30%GF	1	UL94V-0	X: ±0.35	X: ±2'	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	BACK COVER	COPPER ALLOY/SPCC	1	PLATED NICKEL	X ±0.3	X' ±1'	MAT'L						
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE						
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH						
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE						
ND	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTCH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTCH INC.			Q'TY	TITLE: USB3.0 BIF 90° DIP 弯脚 H12.6 成品图	PART NO.: USBF-09* N-4BLRC15			
							SEE NOTE	DR: <i>yan</i> 2017/01/09					
							Q'TY	CHKD: <i>yan</i> 2017/01/09					
								APPD: <i>yan</i> 2017/01/09	DWG NO.: A11-RC15	SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	

1 2 3 4 5 6 7