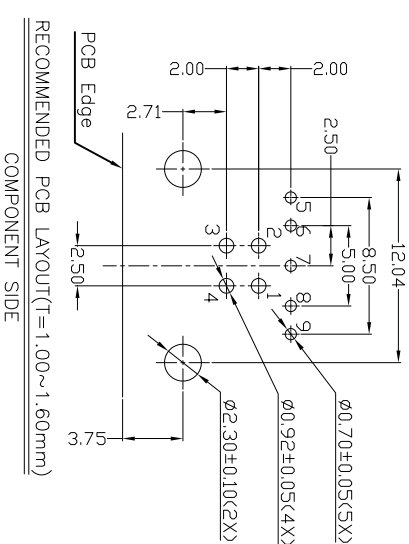


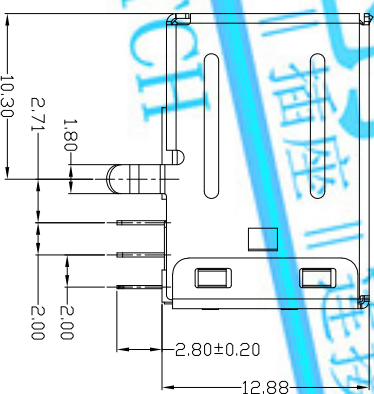
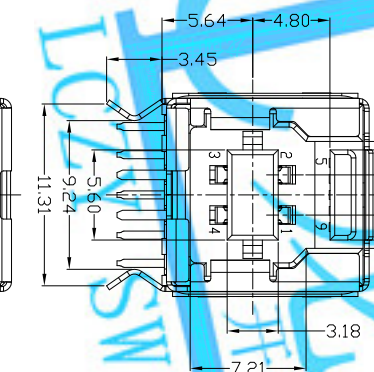
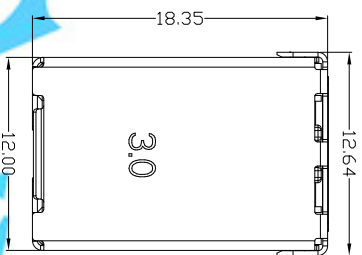


NOTES:
1.ELEC

1.ELECTRICAL:

1)CURRENT RATING: 1.5AMP.

2)INSULATION RESISTANCE: 1000M Ω MIN;

3) CONTACT RESISTANCE: 30mΩ MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$


2. Mechanical:

1) Matina Force: 35N MAX

2) Unmating Force: 10N MIN

3. DIMENSIONS MARKED "▲"

TO BE CHECKED BY OJC & IPOC:

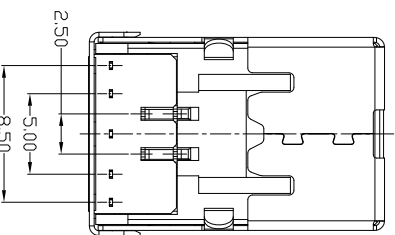

LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
					UNITS mm	TITLE:	
						USB3.0 BF 90° DIP 内弯脚 H12.9	PART NO.: USBF-09XN-4BLRU35
E	HOUSING	LCP+30%GF	1	UL94V-0	MAT'L	DR: <i>Jeddy</i> 2019/2/15	DWG NO.: AII-RU35
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	SEE NOTE		
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	FINISH SEE NOTE		
1	TERMINAL(SP)	COPPER ALLOY	5	PLATED GOLD/TIN	Q'TY	CHKD: <i>Jeddy</i> 2019/2/15	SCALE SHEET REV.
ND	PARTS	MATERIAL	QTY	FINISHING		APPD:	1:1 1/1 B CUSTOMER DRAWING

REV	LTR	DESCRIPTION	DATE	REVISER	APPD