




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

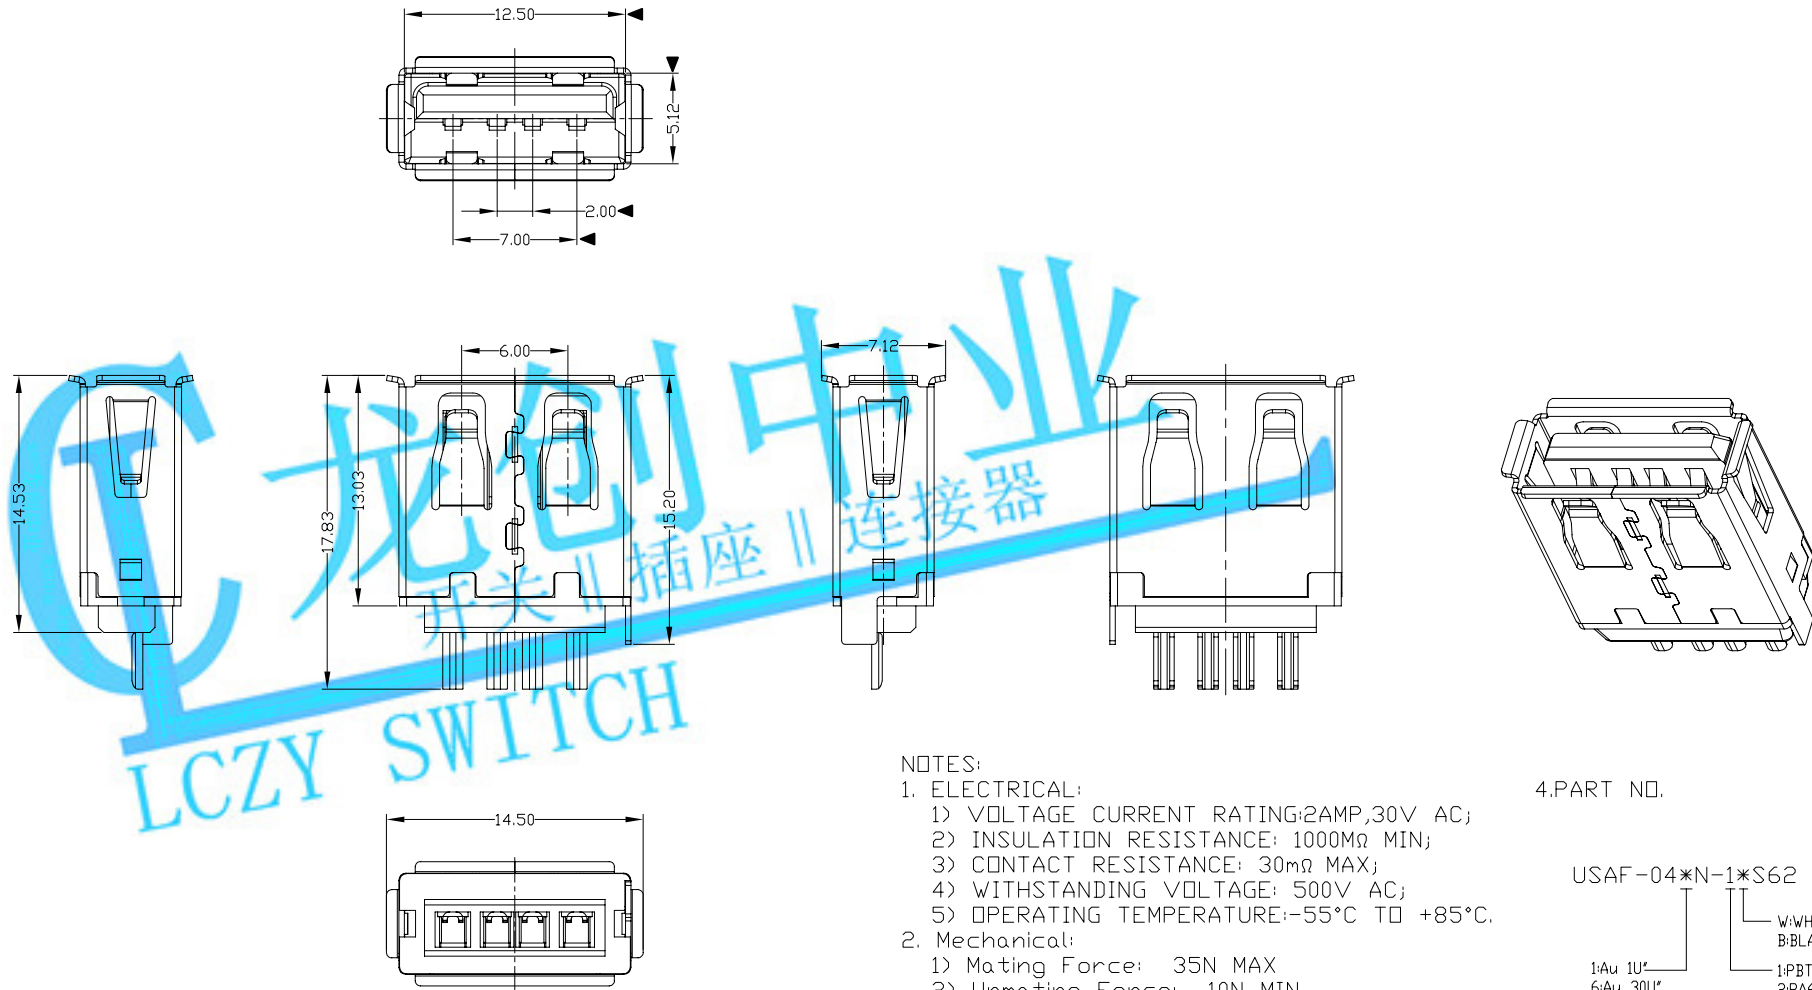

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*S62

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP


Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ± 0.35	X.* $\pm 2^{\circ}$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ± 0.3	.X.* $\pm 1^{\circ}$	MAT'L	TITLE: USB A TYPE FEMALE SOLDER CONN		PART NO.: USAF-04*N-1*S62		
					.XX ± 0.25	.XX*	SEE NOTE					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH	DR: <i>gan</i> 2012/06/30		DWG NO.: AII-S62		
					SEE NOTE							
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD: <i>gan</i> 2012/06/30		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING		
												



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

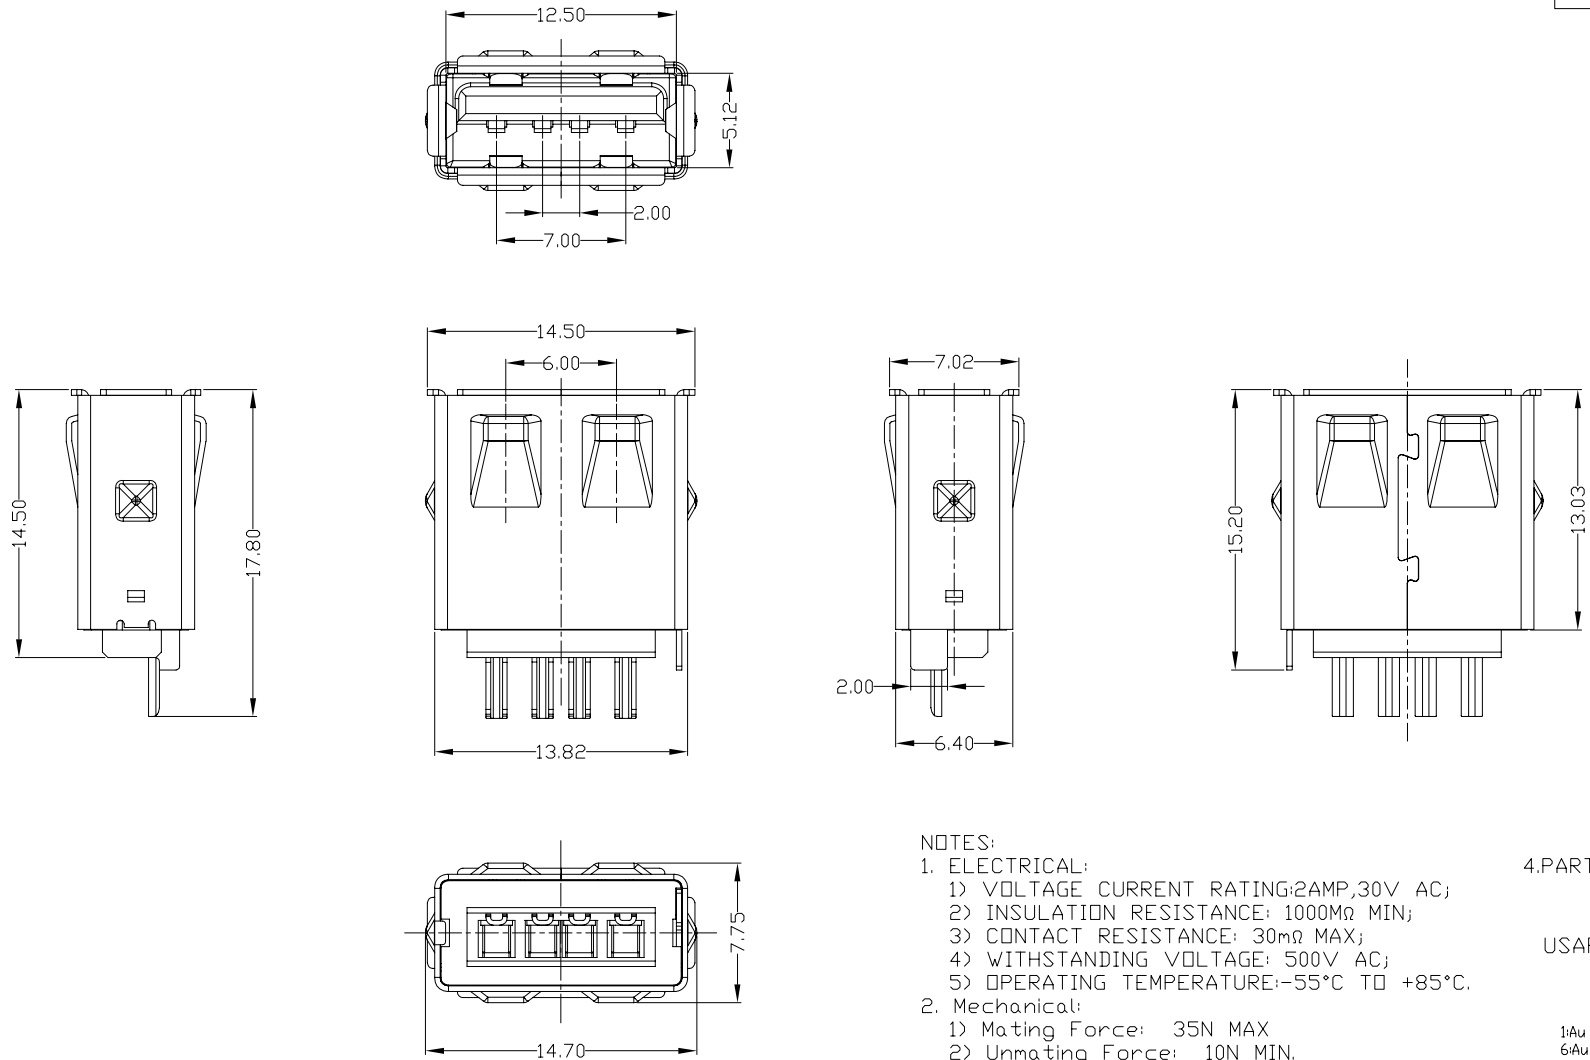

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*S62-C

1Au 10"
6Au 30U"

W: WHITE
B: BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

4	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
3	AEGIS SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X.* ±1*	MAT'L					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	TITLE:	PART NO.:			
					.XXX ±0.15	.XXX*	FINISH	USB AF 180度 焊線短体加护套		USAF-04*N-1*S62-C		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR:	gan 2013/02/21		DWG NO.:	
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD:	gan 2013/02/21		AII-S62-C	
						APPD:	SCALE		SHEET	REV.	CUSTOMER DRAWING	
								1:1	1/1	B		