




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

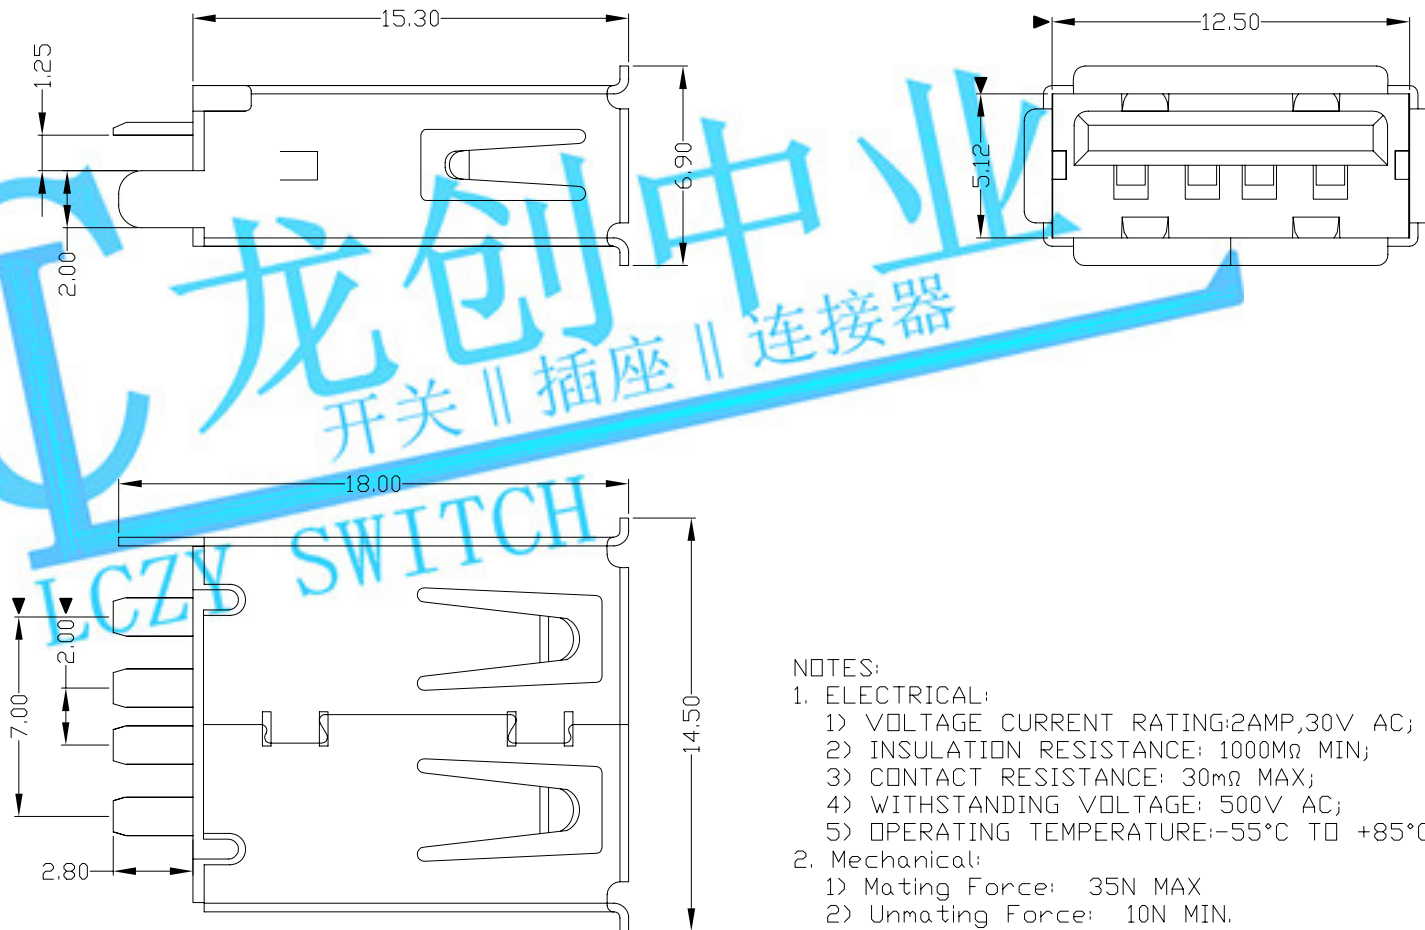

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.


3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*S80	
1: Au 1U"	W: WHITE
6: Au 30U"	B: BLACK
	1: PBT
	2: PA6T
	3: PA9T
	4: LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ± 0.35	X.* $\pm 2^{\circ}$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ± 0.3	.X* $\pm 1^{\circ}$	MAT'L	TITLE:		PART NO.:					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ± 0.25	.XX*	SEE NOTE	USB A/F 180° 焊线式		USAF-04*N-1*S80					
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ± 0.15	.XXX*	FINISH	DR:		DWG NO.:					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	gan 2012/7/03		AII-S80						
						Q'TY	CHKD:		SCALE			SHEET	REV.	CUSTOMER DRAWING	
										gan 2012/7/03		1:1	1/1		B
										APPD:					

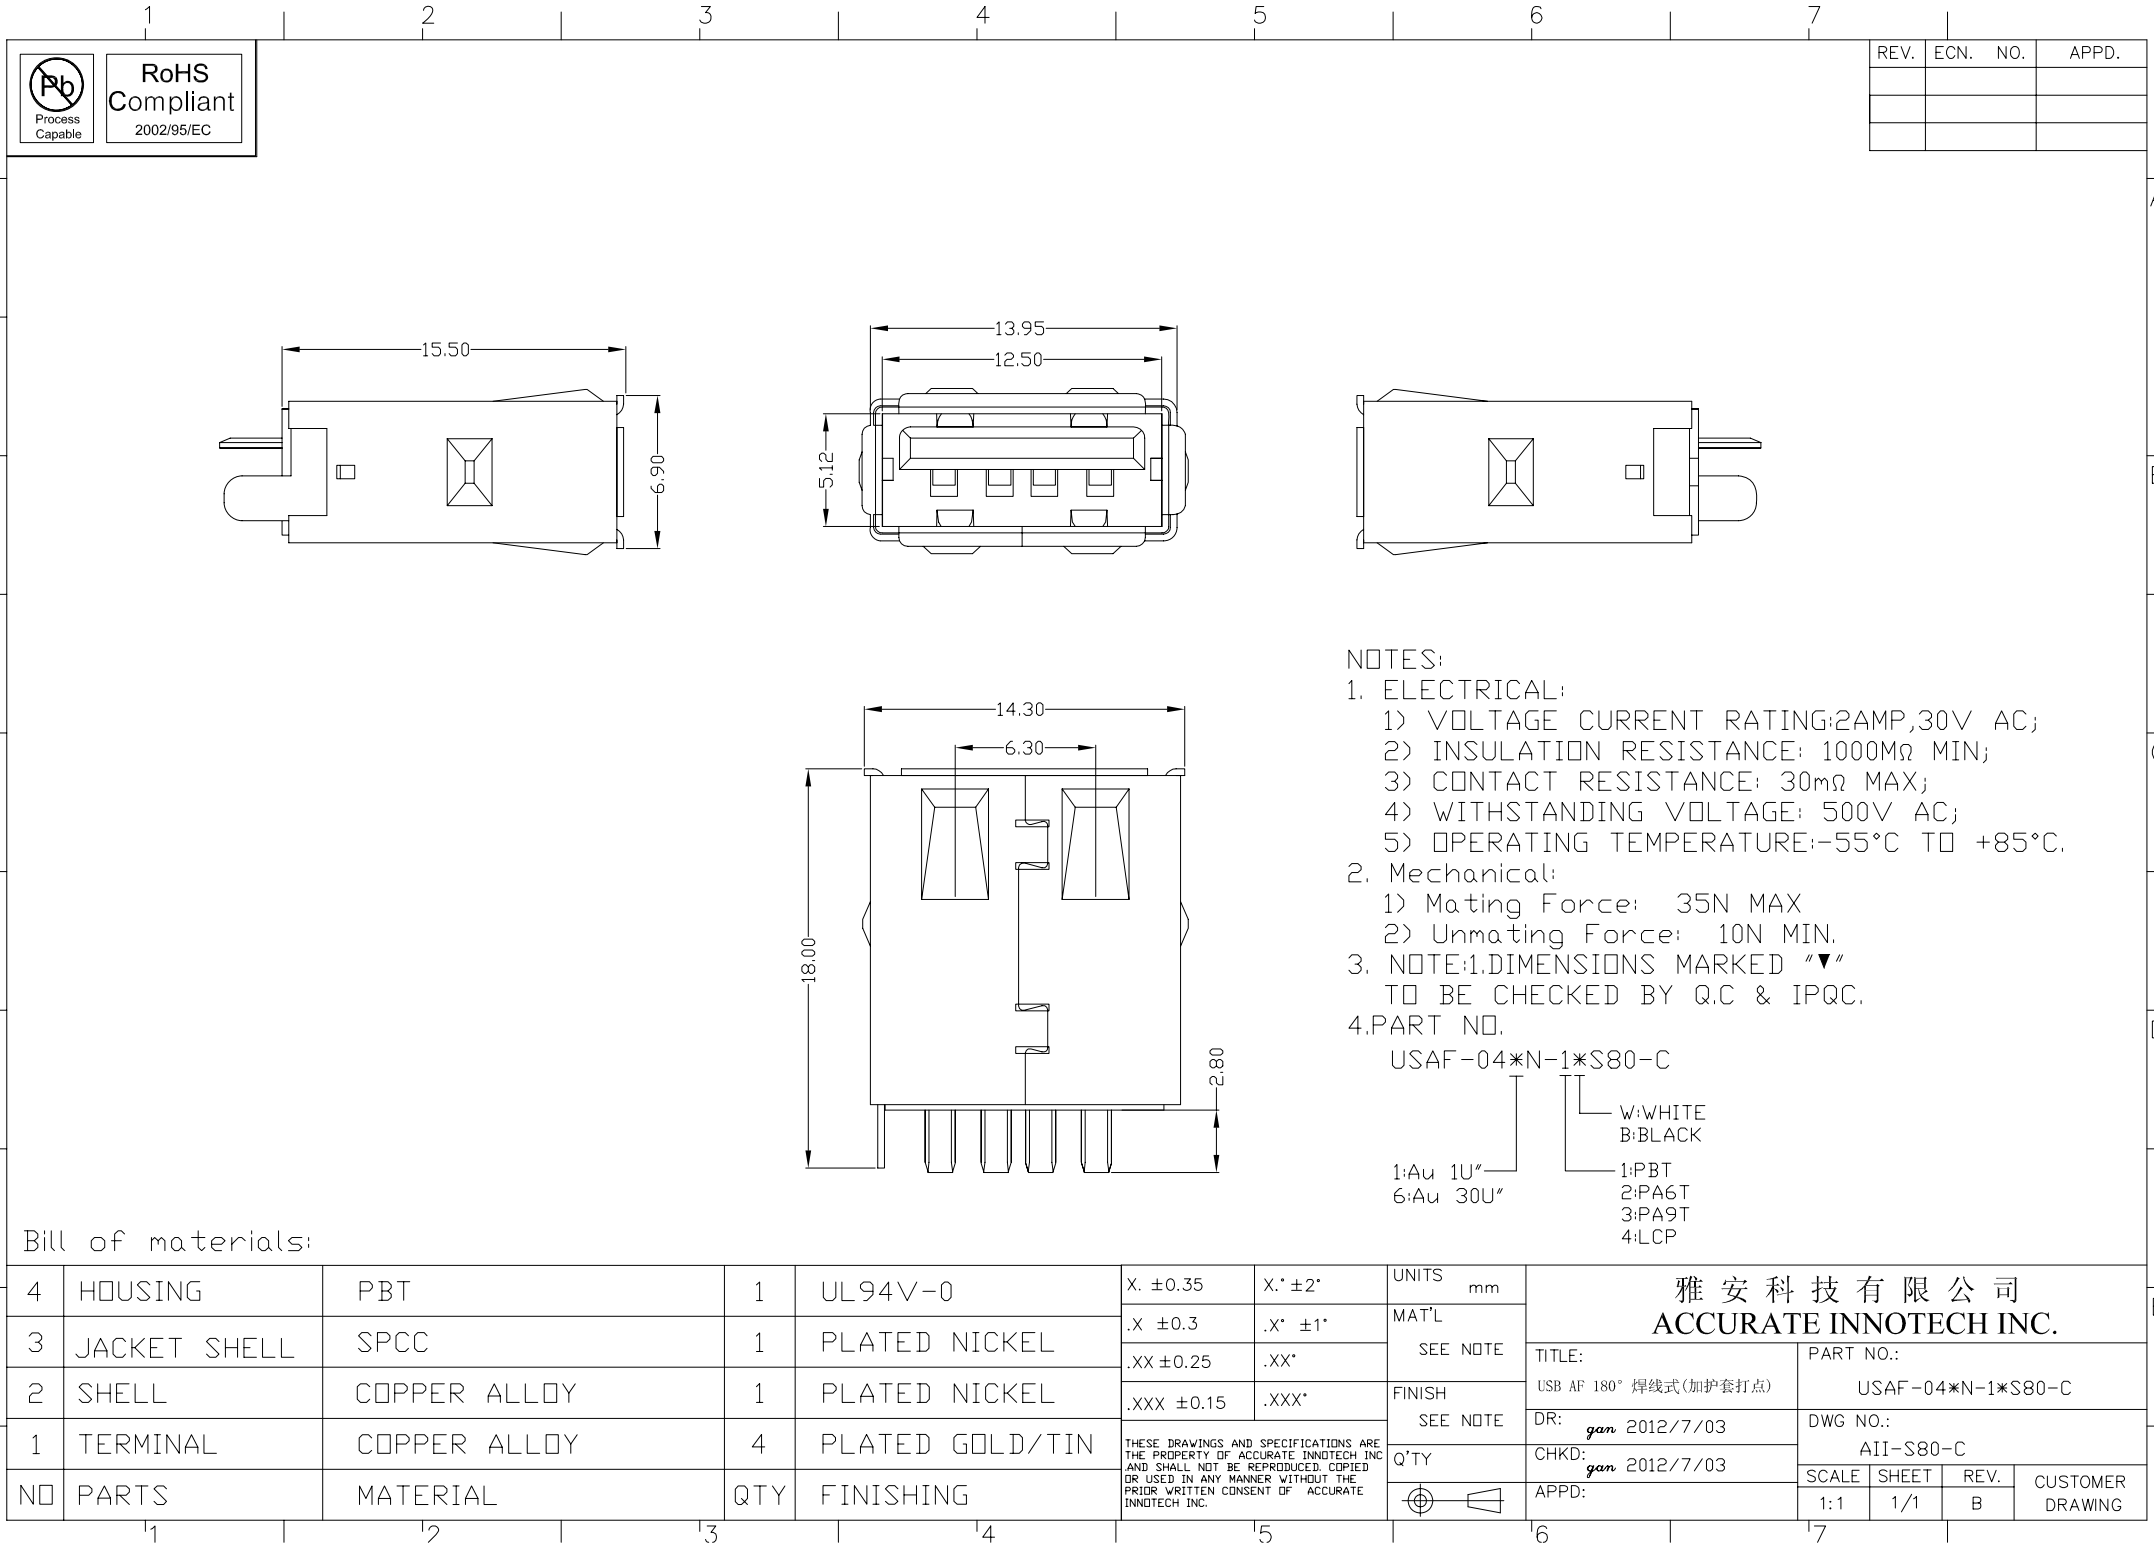

REV.	ECN.	NO.	APPD.

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING:2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.
 - PART NO.

USAF-04*N-1*S80-C

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

4	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
3	JACKET SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X.* ±1°	MAT'L							
					.XX ±0.25	.XX*	SEE NOTE		TITLE:		PART NO.:			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH		USB AF 180° 焊线式(加护套打点)		USAF-04*N-1*S80-C			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE		DR: gan 2012/7/03		DWG NO.:			
							Q'TY		CHKD: gan 2012/7/03		AII-S80-C			
NO	PARTS	MATERIAL	QTY	FINISHING					APPD:		SCALE	SHEET	REV.	CUSTOMER
											1:1	1/1	B	DRAWING