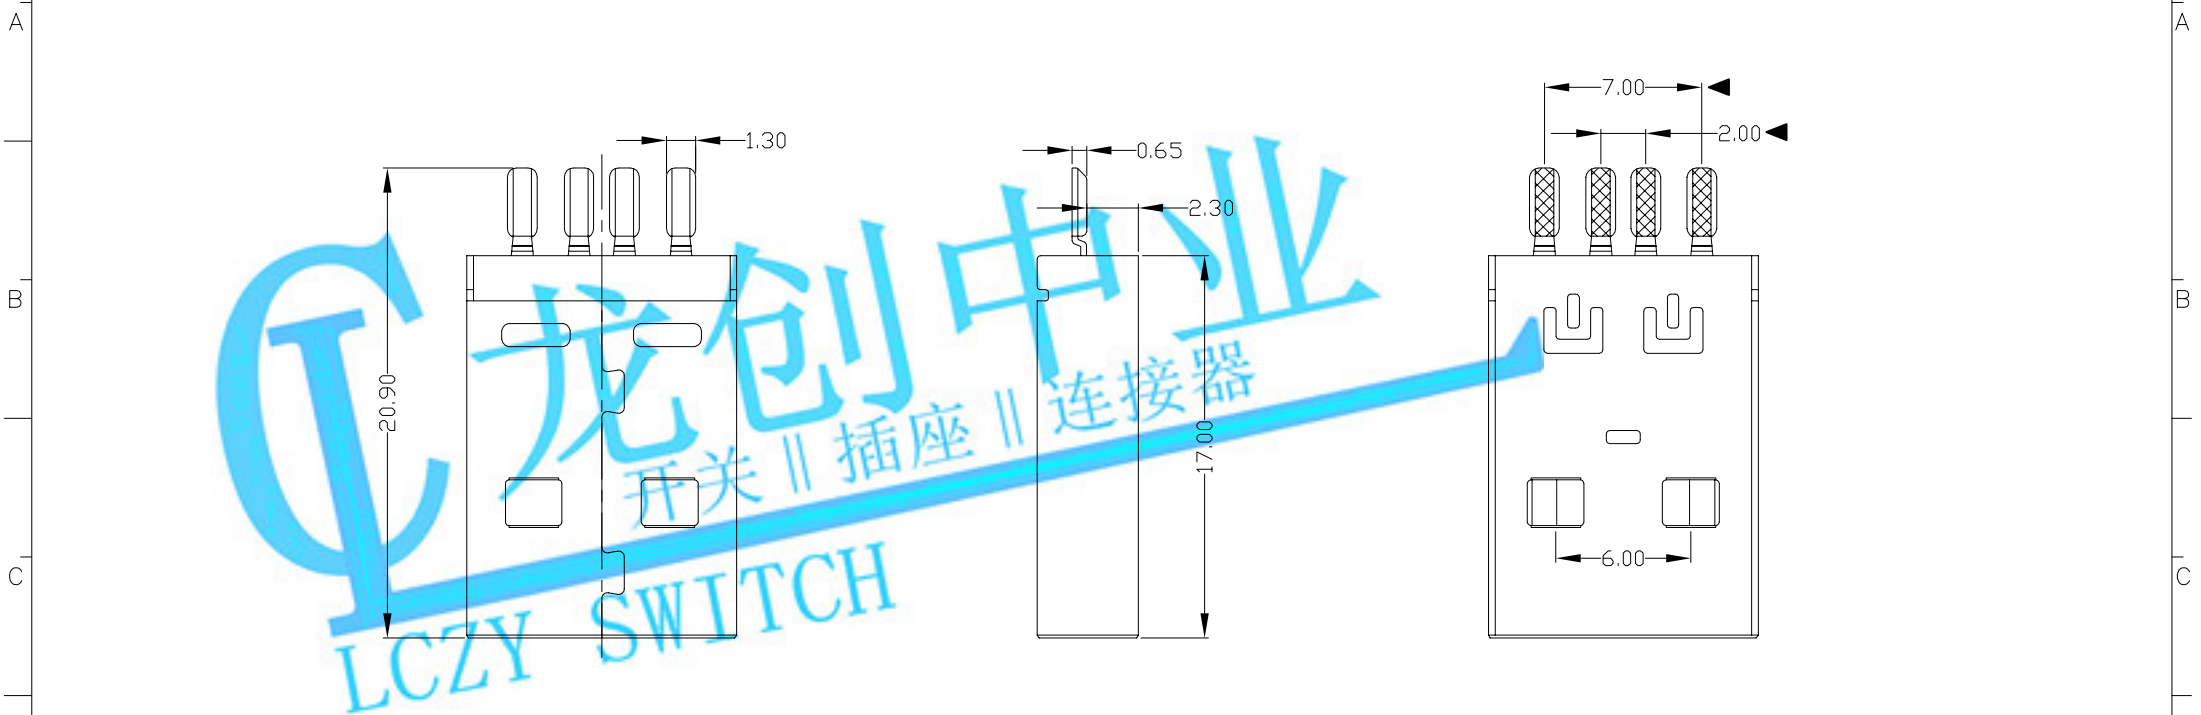


NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING:2AMP,30V AC;
2) INSULATION RESISTANCE: 1000MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE:-55℃ TO +85℃.
2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN;
3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USAM-04*N-1*S87
1:Au 1U"
6:Au 30U"
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
	2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L								
						SEE NOTE										
	1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	SEE NOTE	TITLE:	PART NO.:					
						.XXX ±0.15	.XXX*			USB A/M 短体焊线式(无后托)	USAM-04*N-1*S87					
						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			DR:	gan 2012/7/04		DWG NO.:				
								Q'TY		gan 2012/7/04		AII-S87				
										CHKD:			SCALE	SHEET	REV.	CUSTOMER
										APPD:			1:1	1/1	B	DRAWING