


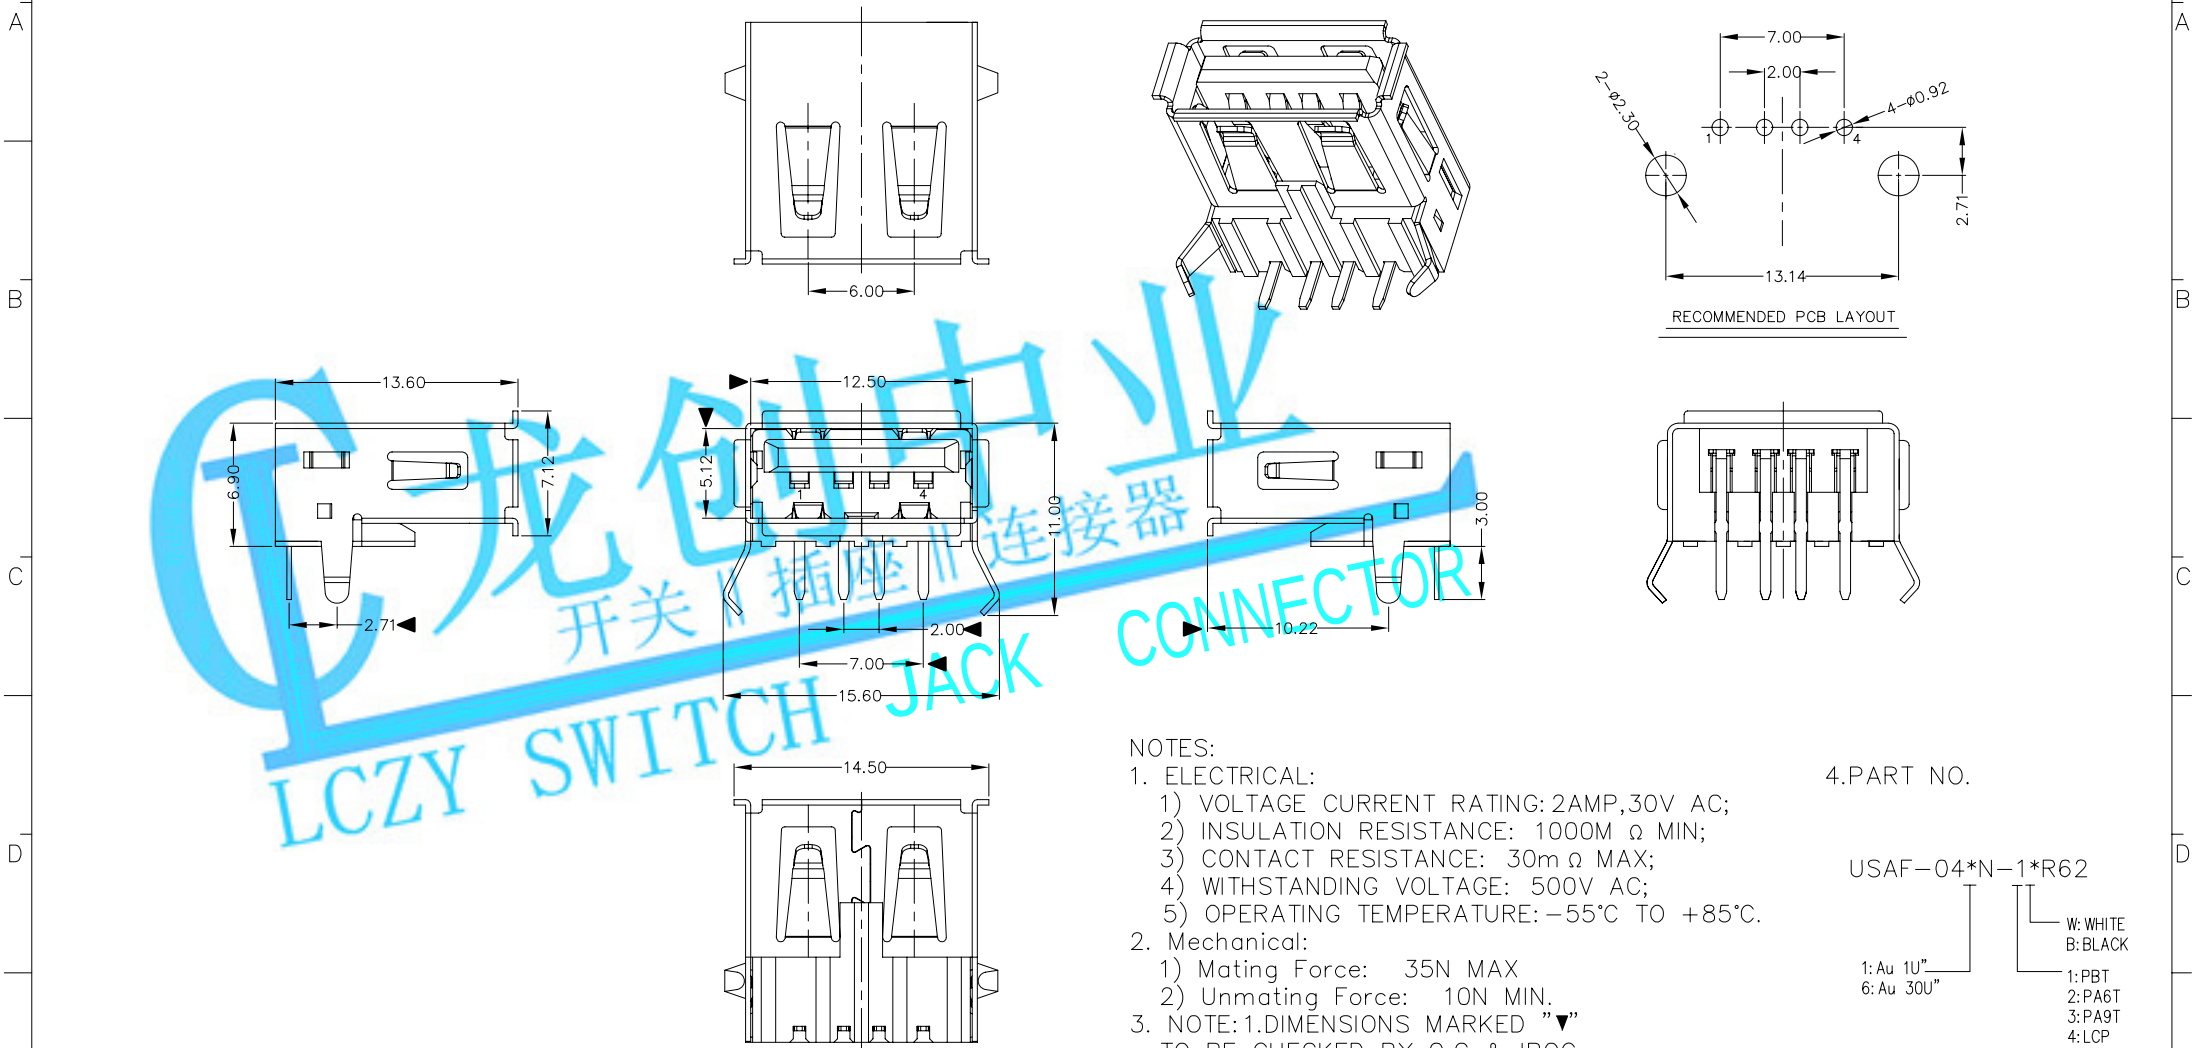

NOTES:

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING: 2AMP,30V AC;

2) INSULATION RESISTANCE: 1000M Ω MIN;

3) CONTACT RESISTANCE: 30m Ω MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

1) Mating Force: 35N MAX

2) Unmating Force: 10N MIN.

3. NOTE: 1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*R62

1: Au 1U"
6: Au 30U"

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X.* $\pm 2^{\circ}$	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
3	HOUSING	PBT	1	UL94V-0	.X ± 0.3	.X.* $\pm 1^{\circ}$	MAT'L		TITLE: USB A/F 90° DIP 弯脚 无后盖 DR: gan 2012/6/29 CHKD: gan 2012/6/29 APPD:			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*	SEE NOTE					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY				
									PART NO.: USAF-04*N-1*R62			
									DWG NO.: All-R62			
									SCALE SHEET REV. CUSTOMER DRAWING			
									1:1 1/1 B			