







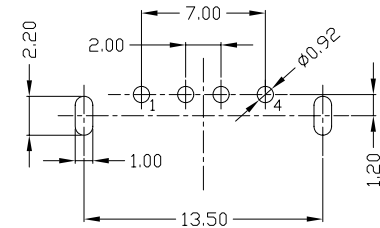


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT



NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000M Ω MIN;
- 3) CONTACT RESISTANCE: 30m Ω MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R634

1*Au 1U*
6*Au 30U*
W: WHITE
B: BLACK
1*PBT
2*PA6T
3*PA9T
4*LCP

Bill of materials:

					X. ± 0.35	X.* $\pm 2^{\circ}$	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X* $\pm 1^{\circ}$	MAT'L							
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ± 0.25	.XX*	SEE NOTE	TITLE: USB AF DIP 90度 沉板2E有卷边 (端子脚加长)		PART NO.: USAF-04*N-1*R634				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH	DR: <i>gan</i> 2014/11/18		DWG NO.: AII-R634				
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	CHKD: <i>gan</i> 2014/11/18		SCALE		SHEET	REV.	CUSTOMER DRAWING
							Q'TY			1:1		1/1	B	
								APPD:						