

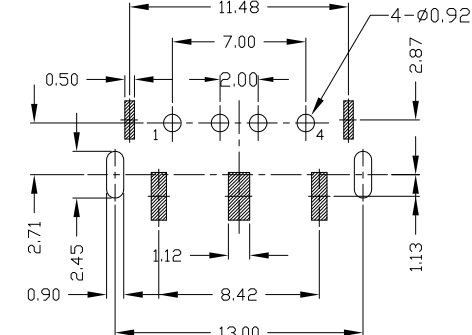

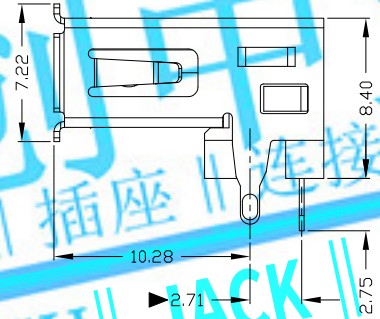



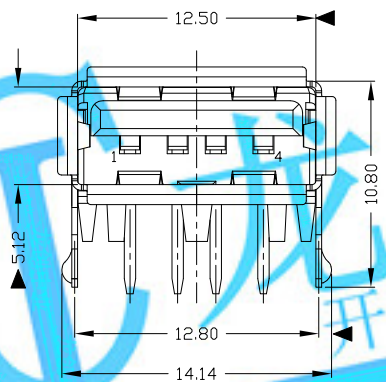

RoHS
Compliant
2002/95/EC

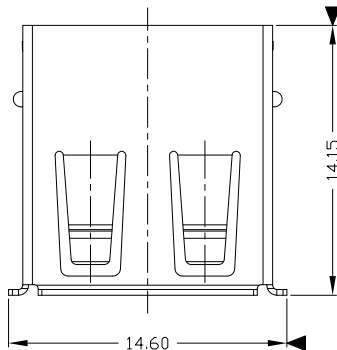

RECOMMENDED PCB LAYOUT

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ, MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R628

1: Au 1U"
6: Au 30U"
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.30	.X* ±1*	MAT'L						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE	TITLE: USB AF DIP 90度 墊高型H8.4 (外壳直腳有凸點)			PART NO.: USAF-04*N-1*R628		
					.XXX ±0.15	.XXX*	FINISH	DR: Ricky 2014/04/29			DWG NO.: AII-R628		
					SEE NOTE			CHKD: Ricky 2014/04/29			SCALE SHEET REV. CUSTOMER		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:			1:1 1/1 B CUSTOMER DRAWING		
													