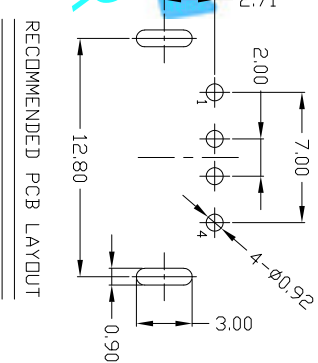
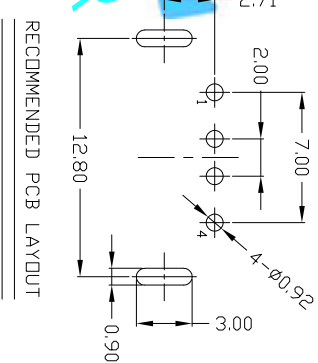
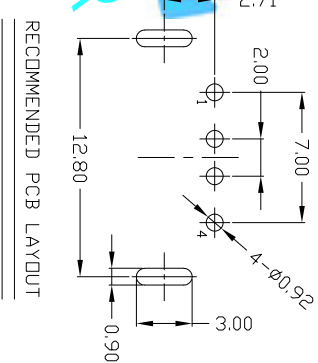
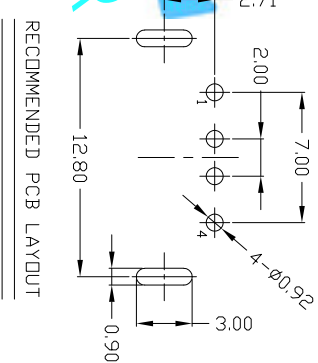
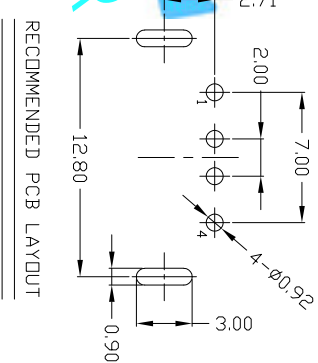
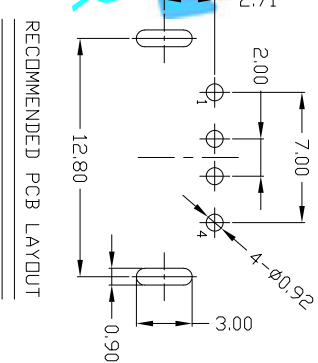
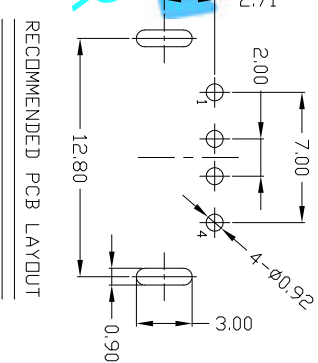
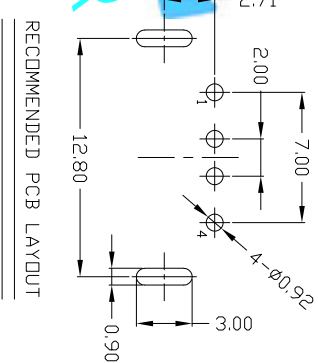
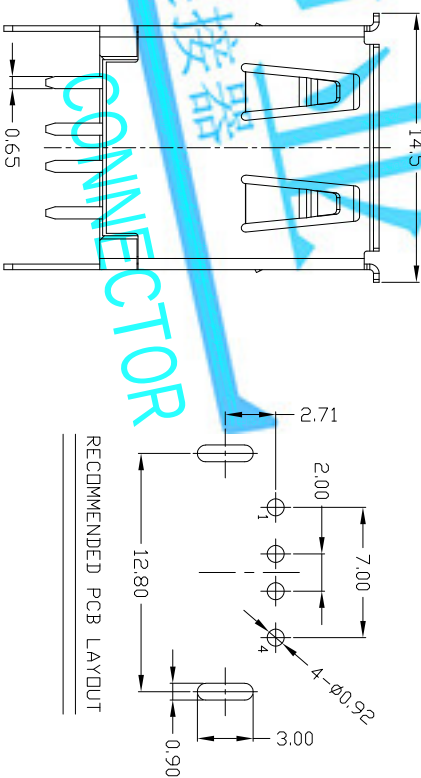
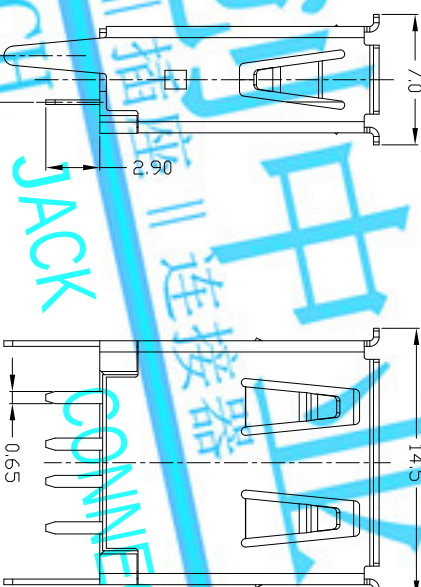
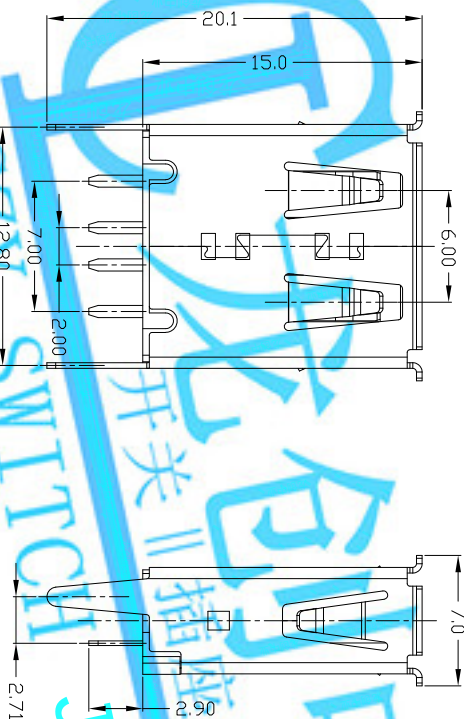


NOTES:
1. ELED

1. ELECTRICAL:

1) VOLTAGE CURRENT RATING:2AMP,30V AC:

2) INSULATION RESISTANCE: 1000M Ω MIN;

3) CONTACT RESISTANCE: 30m Ω MAX;

4) WITHSTANDING VOLTAGE: 500V AC;

5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

1) Matino Force: 35N MAX

2) Limiting Force: 10N MIN.

3 DIMENSIONS MARKED "▼" TO BE CHECKED

3. DIMENSIONS OF BYOC & IPOC

4. PART NO.

USAF-04*N-1*P602

1Au 1U'
6Au 30U'

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

1Au 1U' —
6Au 30U' —

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

1Au 1U'
6Au 30U'

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

1Au 1U' —
6Au 30U' —

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

1Au 1U'
6Au 30U'

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

1Au 1U'
6Au 30U'

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

1Au 1U' —
6Au 30U' —
1:PB
2:PA6T
3:PA9T
4:1CP

1Au 1U'
6Au 30U'

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:ICP

Bill of materials:

4	COVER	PBT+30%GF	1	UL94V-0
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X. ± 0.35	X. $\pm .2^*$	UNITS	mm
.X ± 0.3	.X* $\pm 1^*$	MAT'L	
.XX ± 0.25	.XX*	SEE NOTE	
.XXX ± 0.15	.XXX*	FINISH	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF THE Q&T COMPANY, INC. AND ARE NOT TO BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDUCTEC INC.		Q'TY	
			
		SEE NOTE	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE:		PART NO.:	
USB AF DIP 180° 全包直脚 半边(15.0)		USAF -04※N-1※P602	
DR:	year 2016/9/20	DWG NO.:	
CHKD:	year 2016/9/20	AII-P602	
APPD:		SCALE	SHEET
		1:1	1/1
		B	REV.
		CUSTOMER DRAWING	

REV.	ECN.	NO.	APPD.