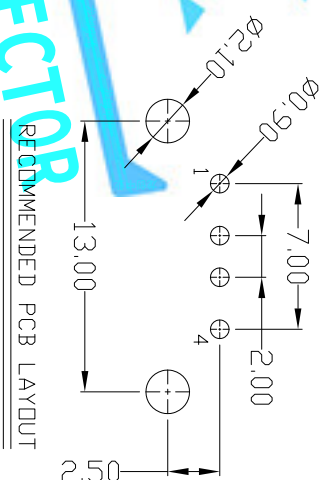


NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. NOTE::DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

[illegible]