



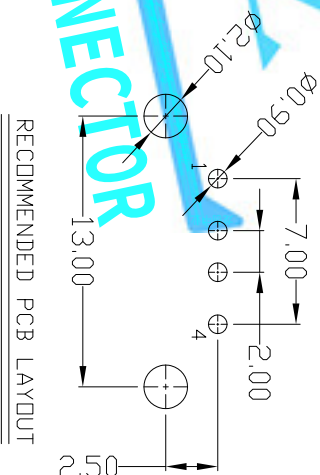

RoHS
Compliant
2002/95/EC

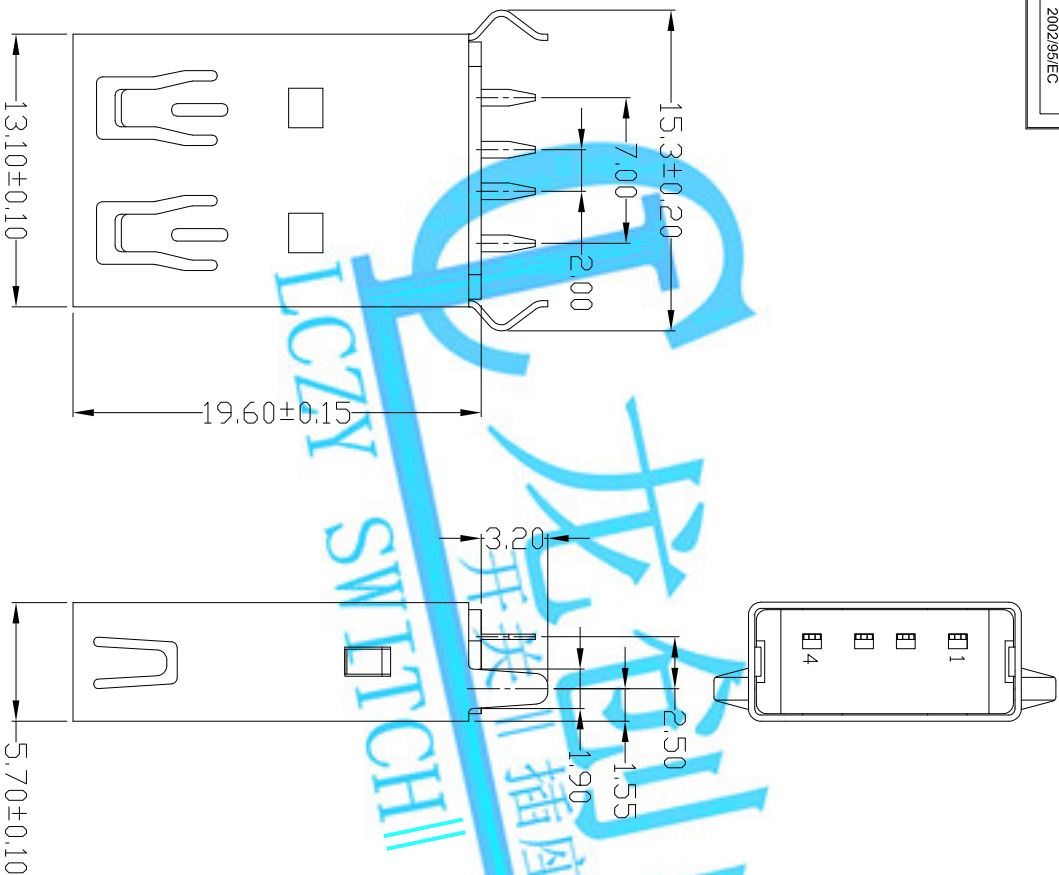

Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2°	UNITS	mm
X: ±0.3	X': ±1°	MAT'L	SEE NOTE
.XX ±0.25	.XX'	FINISH	SEE NOTE
.XXX ±0.15	.XXX'	QTY	APPD:

LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
TITLE: USB AF DIP 180度 全包 无卷边弯脚有后塞 19.6			
DR: Rudy 2018/11/22			
CHKD: Rudy 2018/11/22			
PART NO.: USAF-04XN-1XPZ27-S			
DWG NO.: AII-PZ27-S			
SCALE: 1:1			
SHEET: 1/1			
REV: B			
CUSTOMER DRAWING			

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.
- 4.PART NO. USAF-04XN-1XPZ27-S
- 10u 10² 6Au 30u²
- W/WHITE B/LBLACK 1PBT 2PA6T 3PA9T 4LGP