
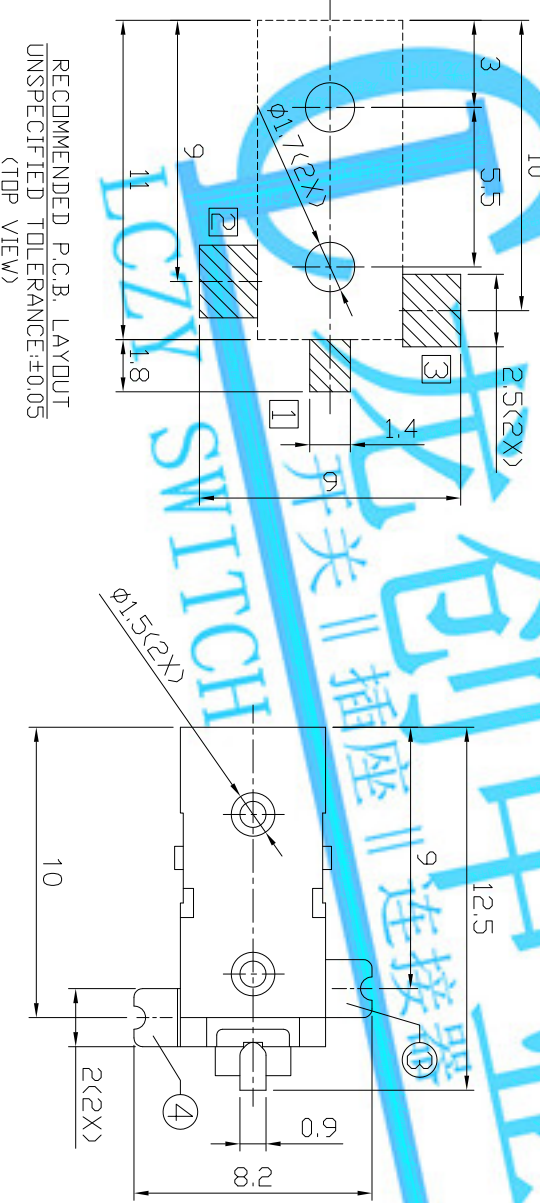
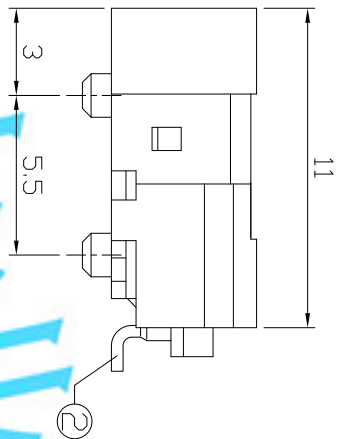


DIMENSIONS

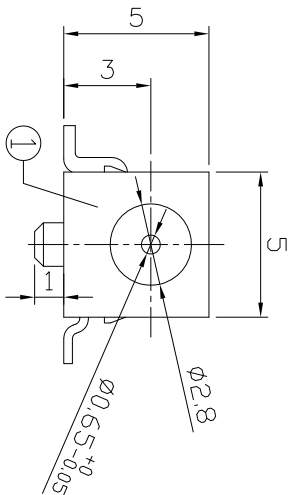

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)



○: ITEM NO. □: TERMINAL NO.

④	Shunt terminal	③	Brass	±0.4	1	Silver plating	±0.3	±2°	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
③	Tip spring	②	Stainless steel	±0.25	1	Silver plating			SEE NOTE	TITLE: SMD DC POWER JACK			
②	Center pin	①	Phosphor bronze		1	Silver plating			FINISH	PART NO.: DCB0-0011B			
①	Housing		PA9T		1	Black			Q'TY	DR: 2018/06/12			
ND.	PARTS		MATERIAL		Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			CHKD: 2018/06/12	DWG NO.: AB0-0011B		
										SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	A	

REV.	ECN.	NO.	APPD.

MODEL CODE:
DCB0-0011B- A A 9T BK S 0 1
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1):Series type:SMD DC POWER JACK.
(2):Series No.
(3):Schematic option: A, B
(4):Center pin diameter:
A=0.65
(5):Material of housing:
9T=PA9T(Standard)
(6):Housing color:
BK=Black
(7):Terminal plating:
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
1=Reel packing

Specification:
1.Rating : DC 30V 1A,
2.Contact resistance: ≤50mΩ
After test:≤100mΩ
3. Insulation resistance: ≥100MΩ (DC500V),
After test:≥50MΩ
4.Withstanding voltage: 500VAC,
5.Insertion and extraction force: 3N~30N,
6.life test: 5000cycles min,
7.Operation temperature range:-20℃~70℃
8.Preservative temperature range:-40℃~85℃

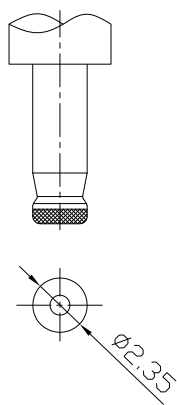

DC MATE PLUG