


DIMENSIONS

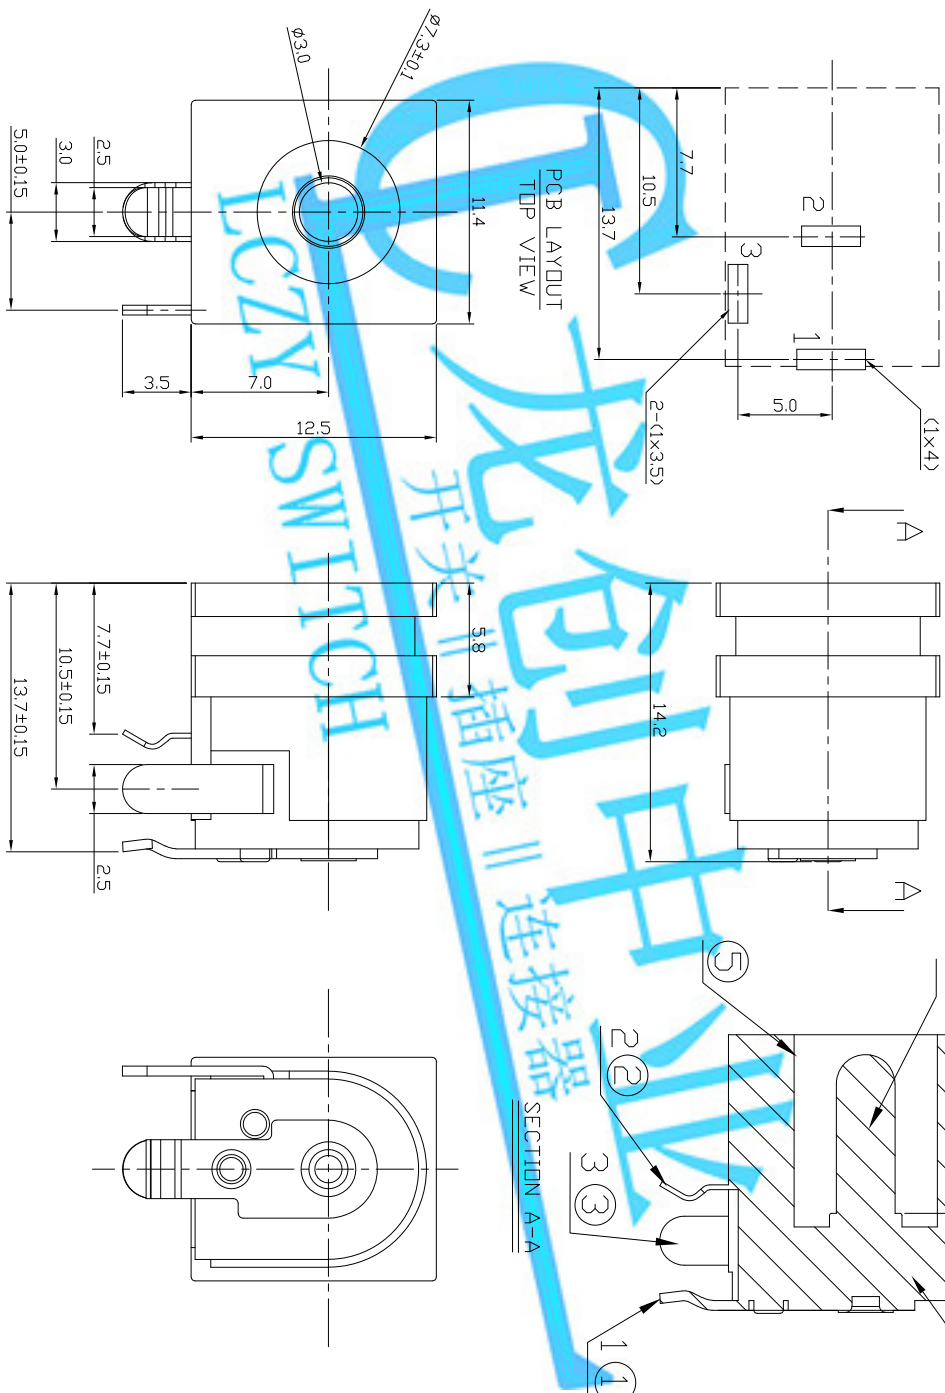


MODEL CODE:



DCS0-02070- A K PB BK S 0 4

(1) Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A
(4):Center pin diameter:
K=ø3.0

(5):Material of housing:
PB=PBt
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
4=Bag packing

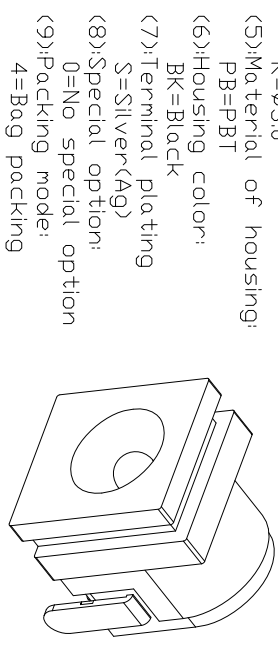

Specification:
1.Rating : DC 24V 5A.
2.Contact resistance : ≤100mΩ.
3.Insulation resistance : ≥100MΩ (DC250V).
4.Withstanding voltage: 500VAC .
5.Insertion and extraction force: 3~30N.
6.life test: 5000cycles min.
7.Operation temperature range:-25℃~85℃

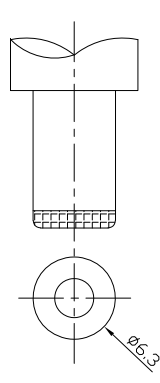

DC MATE PLUG

Model No.	K
CENTER PIN	ø3.0

Bill of materials:

		TOLERANCE	ANGLES	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		X ± 0.25	X°±5°	MAT'L	PART NO.:			
		.XX ± 0.15	.X°±3°	SEE NOTE	DCS0-02070			
		.XXX ± 0.1		FINISH				
				SEE NOTE				
1	HOUSING	PBT(Black)			DR: Ricky 2019/03/22	DWG NO.:	ASS-02070	
2	COVER	PBT(Black)			CHKD: Ricky 2019/03/22	SCALE	SHEET	REV.
3	PIN	BRASS			APPD:	1:1	1/1	A
4	TERMINAL	BRASS						
5	TERMINAL	PHOSPHOR BRONZE						
6	TERMINAL	BRASS						
7	PARTS	MATERIAL						