


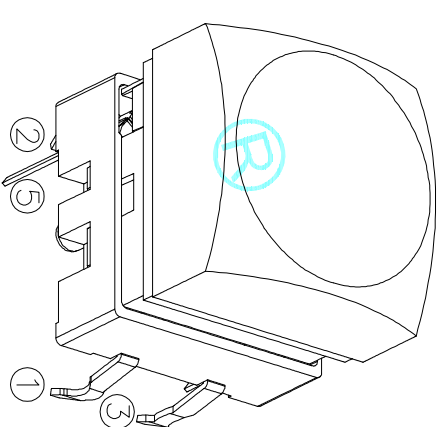








Typical Specifications

1. Rating : DC 30V 0.3A
2. Operating Force : 250 $\pm$ 50 gf
3. Contact Resistance : 100m Ω MAX
4. Life : 100,000 Cycles Min

②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	LCZY (HK) CO., LIMITED
DRAWN	J.X.Zhong 2018/08/01	

[illegible]

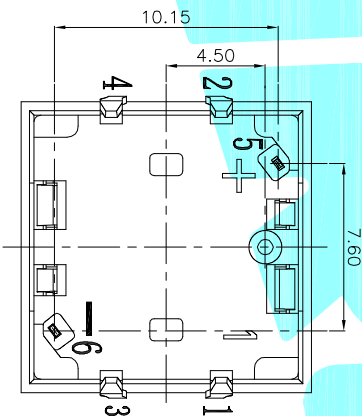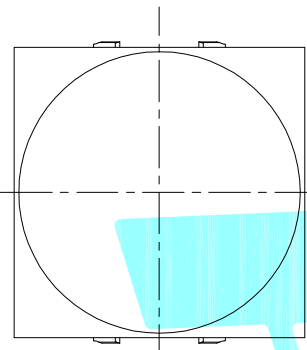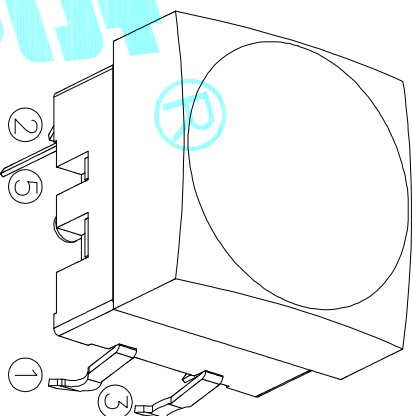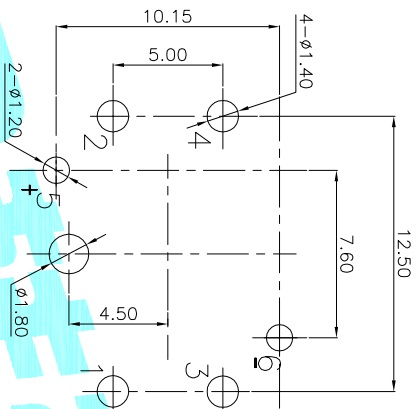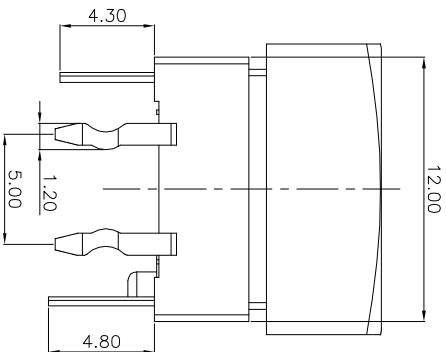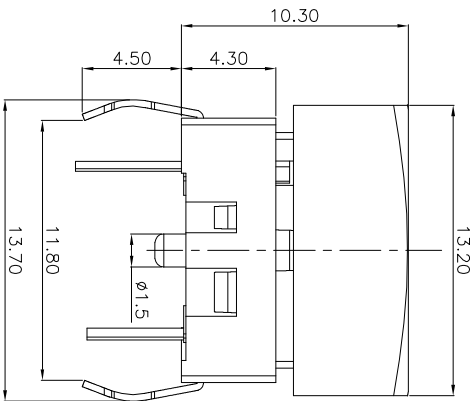

- Typical Specifications
- 1. Rating : DC 30V 0.3A
 - 2. Operating Force : 250 ± 50 gf
 - 3. Contact Resistance : 100mΩMAX
 - 4. Life : 100,000 Cycles Min

②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD			
DRAWN	J.X.Zhang	2018/08/01				

CHECKED		TITLE:		LED Tact Switch		
APPROVALS		PART NO.		K6-6278D		
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ: 1
		5~10	±0.15			
		~5	±0.10	±2°	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			