




ROHS

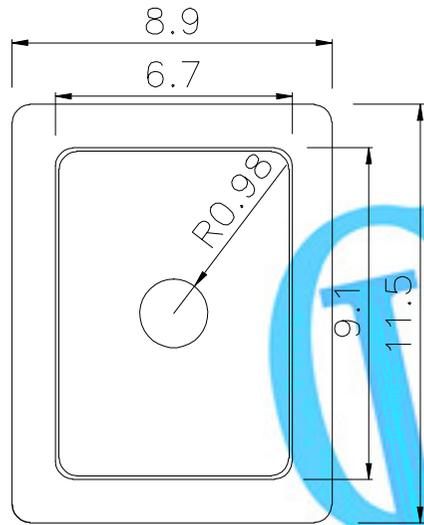



PCB Layout(Pattern Side)

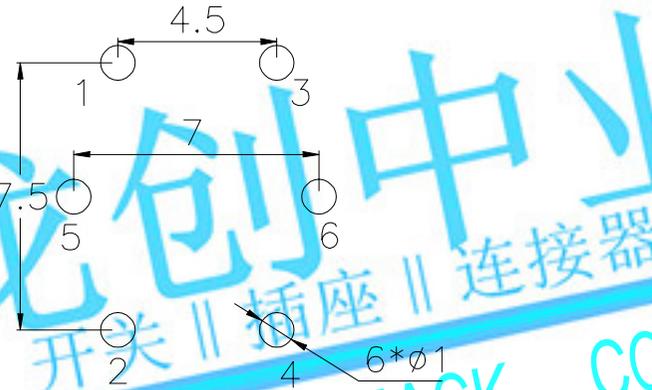

Circuit Diagram



LED colour(LED颜色)	Part No.(料号)
Whiler(白色)	K6-8811D01
Red(红色)	K6-8811D02
Blue(蓝色)	K6-8811D03
Green(绿色)	K6-8811D04

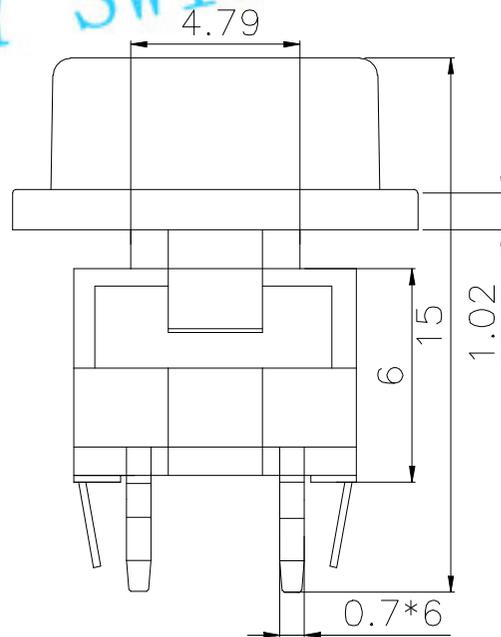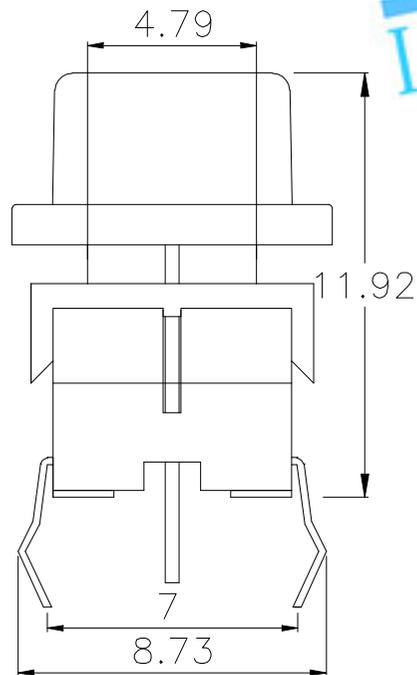

Typical Specifications

- 1.Rating : DC 12V 50mA
- 2.Operating Force : 250 ± 50 gf
- 3.Contact Resistance : 100mΩMAX
- 4.Life : 100,000 Cycles Min

⑦	LED		1		Transparent	——
⑥	Keystoke		1	PA66	White	——
⑤	Spring		1	Keystoke	Ag	——
④	Base		1	PA66	Black	——
③	Cover		1	PA66	Black	——
②	Terminal	——	6	Phosphor bronze	Ag Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DATE

LCZY (HK)CO.,LIMITED

DRAWN

D.J.LV

2017/12/26

CHECKED

TITLE: LED Tact Switch

APPROVALS

PART NO.

K6-8811D-□□

TOLERANCES ARE

30~125 ±0.30

10~30 ±0.20

5~10 ±0.15

~ 5 ±0.10

ANGLE

UNIT: mm

SCALE: 1:1

DRAWING NO.

SHEET 1 OF 1

PROJ:

PROJ:

PROJ:

PROJ:

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—