
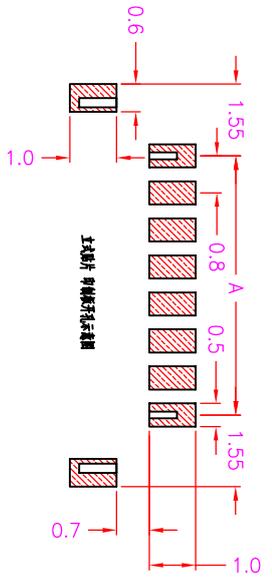
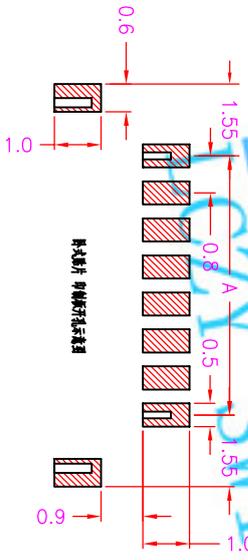
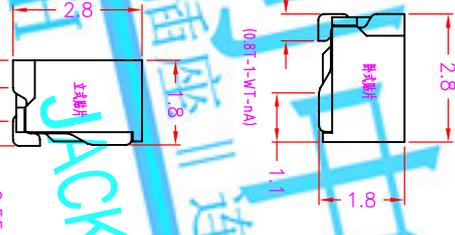


Pin	A	B	C	D
2	0.8	1.9	3.9	3.1
3	1.6	2.7	4.7	3.9
4	2.4	3.5	5.5	4.7
5	3.2	4.3	6.3	5.5
6	4.0	5.1	7.1	6.3
7	4.8	5.9	7.9	7.1
8	5.6	6.7	8.7	7.9
9	6.4	7.5	9.5	8.7
10	7.2	8.3	10.3	9.5
11	8.0	9.1	11.1	10.3
12	8.8	9.9	11.9	11.1
13	9.6	10.7	12.7	11.9
14	10.4	11.5	13.5	12.7
15	11.2	12.3	14.3	13.5

Pin	A	B	C	D
16	12.0	13.1	15.1	14.3
17	12.8	13.9	15.9	15.1
18	13.6	14.7	16.7	15.9
19	14.4	15.5	17.5	16.7
20	15.2	16.3	18.3	17.5
21	16.0	17.1	19.1	18.3
22	16.8	17.9	19.9	19.1
23	17.6	18.7	20.7	19.9
24	18.4	19.5	21.5	20.7
25	19.2	20.3	22.3	21.5
26	20.0	21.1	23.1	22.3
27	20.8	21.9	23.9	23.1
28	21.6	22.7	24.7	23.9
29	22.4	23.5	25.5	24.7
30	23.2	24.3	26.3	25.5

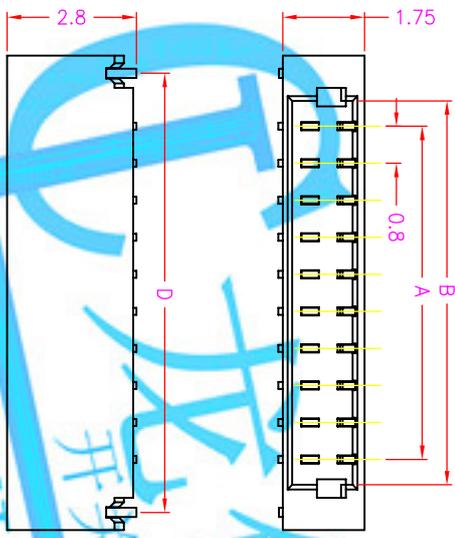

技术参数

间距: 0.8
 温度范围: -25~+85℃
 额定电压: 30V AC, DC
 额定电流: 0.2A, DC (AWG#36)
 0.5A, DC (AWG#32)
 接触电阻: 20mΩ
 绝缘电阻: 500MΩ
 耐压: 200V AC/minute

材料: LCP
 插座: 磷铜带 (镀金/镀锡)
 接触料: 磷铜带 (镀金/镀锡)
 焊片: 黄铜带 (镀金/镀锡)

龙创中业电子科技

型号 MODEL: 0.8T-1-LT(WT)-nA

品名 NAME: 压接式连接器

容许公差GENERAL TOLERANCE	
X.X	±0.1
X.XX	±0.05
X.XXX	±0.005
角度公差ANGLED TOLERANCE	
X.X°	±5.0°
X.XX°	±3.0°
X.XX°	±1.0°

视图方法PROJECTION	

修正 REVISION	日期 DATE
2018-04-20	2018-04-20
2018-04-20	2018-04-20
2018-04-20	2018-04-20

设计DES'D	校对CHK'D	核准APP'D

单位 UNIT	比例 SCALE	张数 SHEET	版本 REV
mm	1:1	1/1	A

A B C D E F