


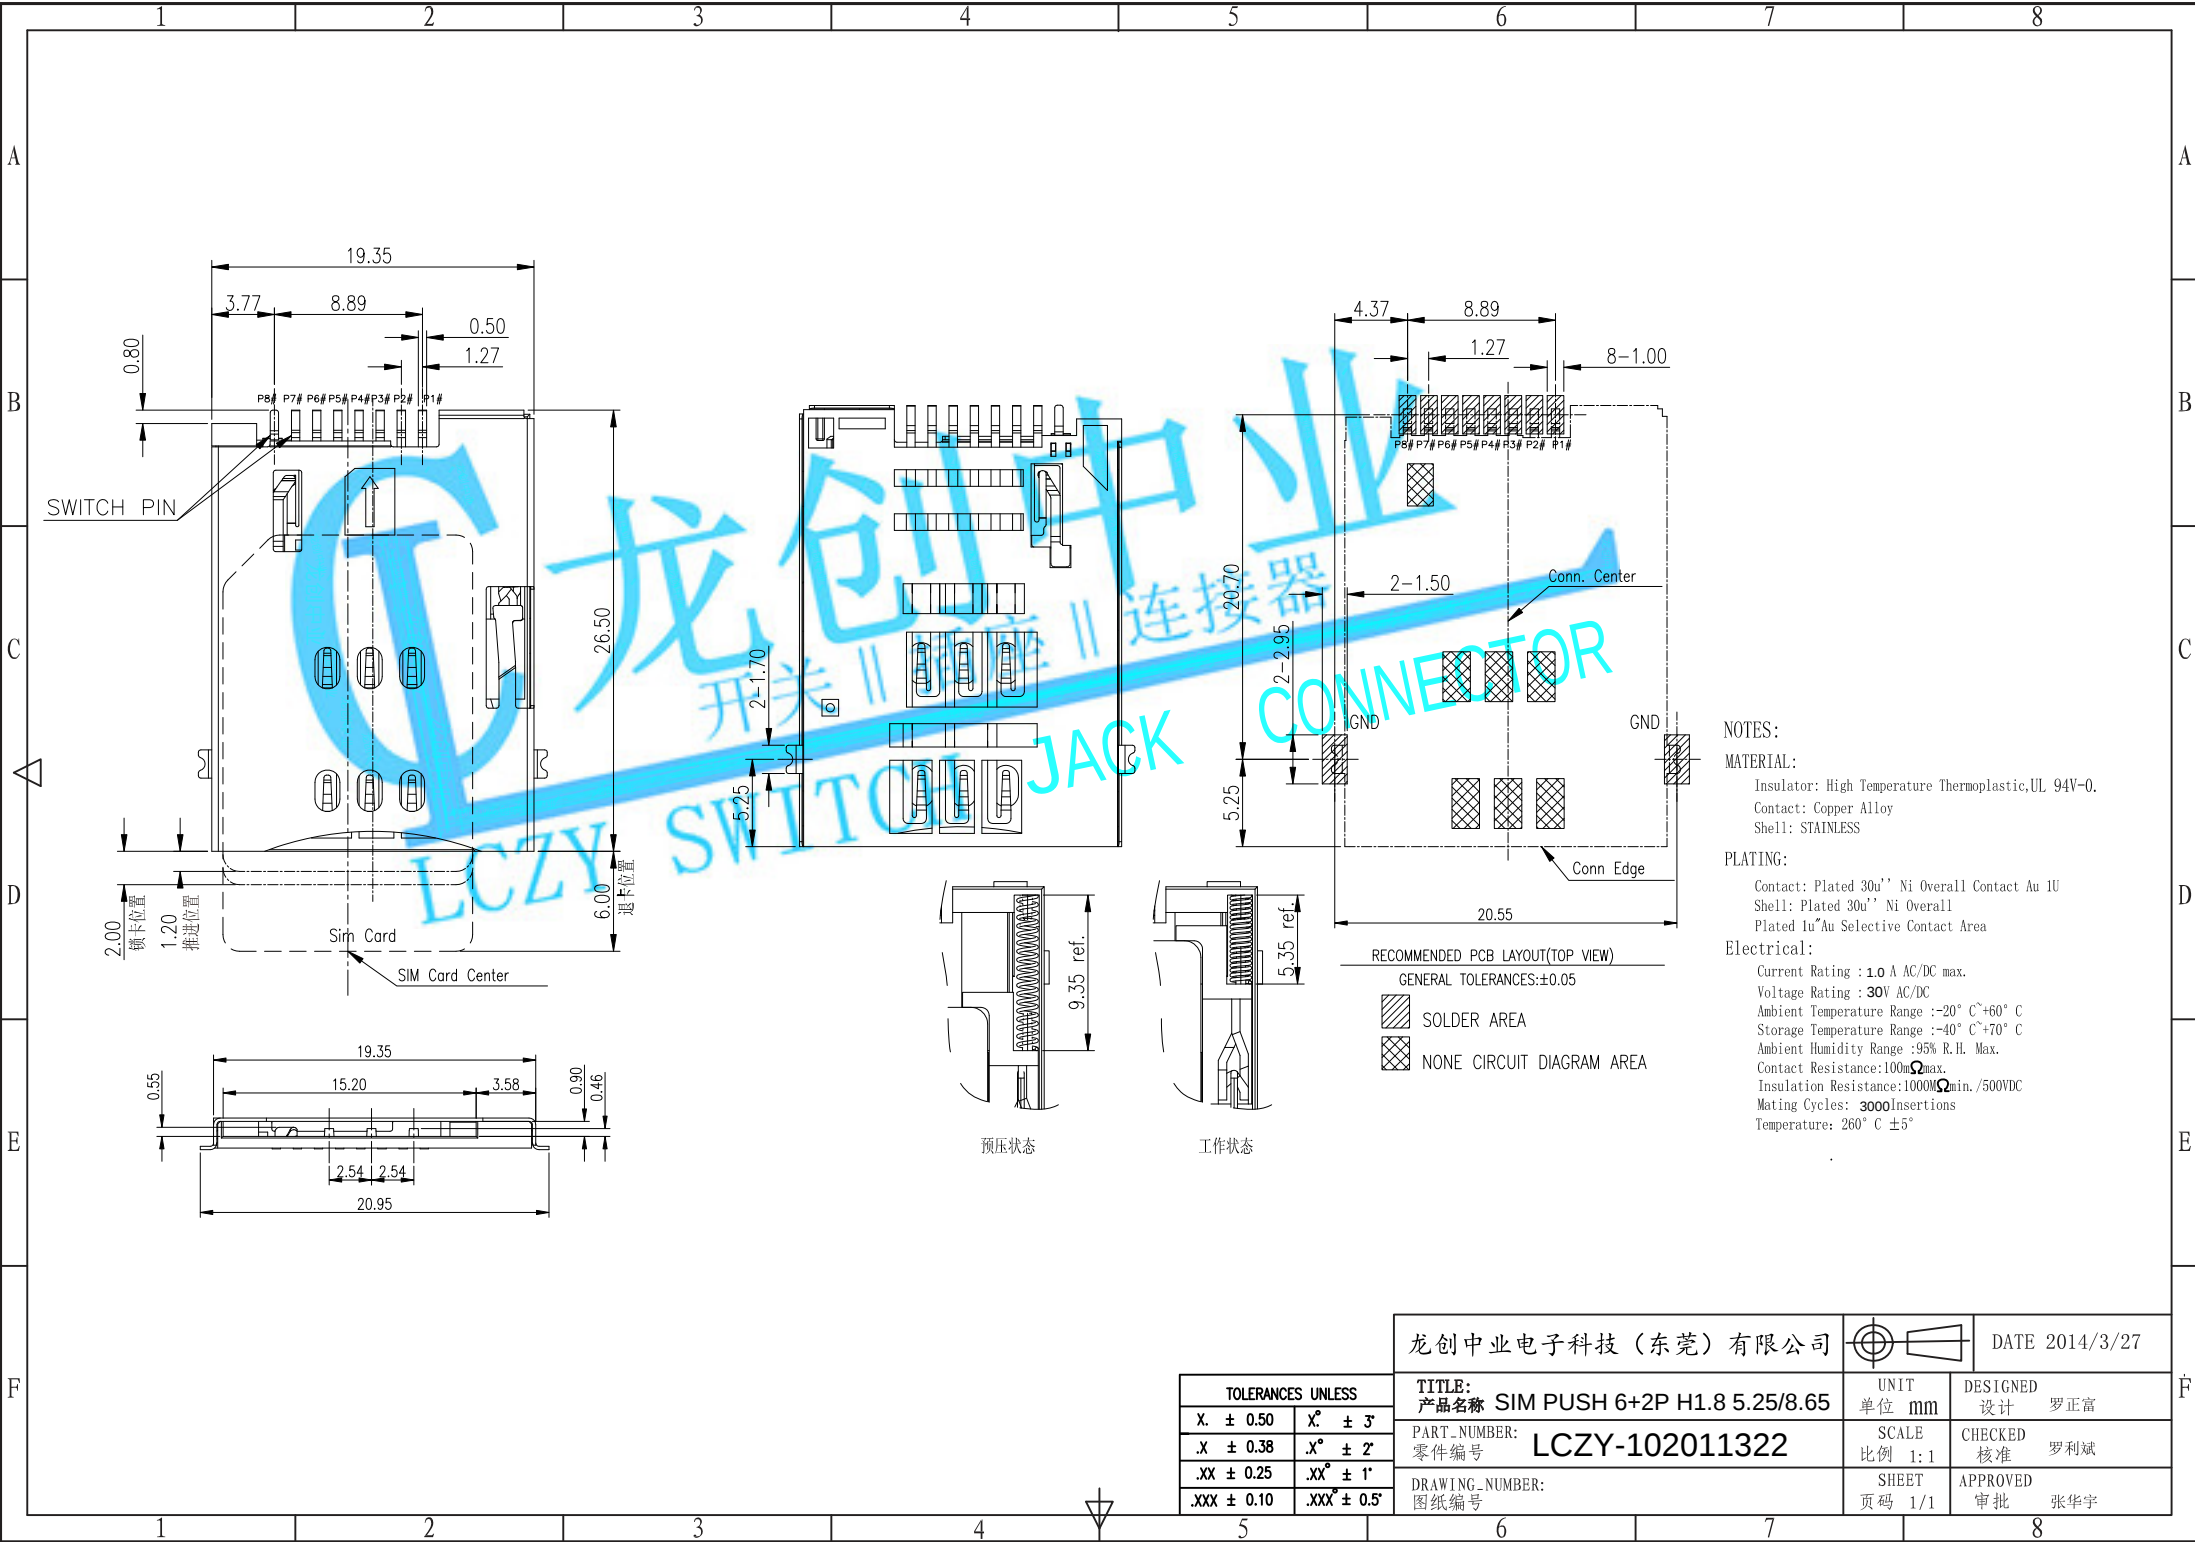

NOTES:  
MATERIAL:  
Insulator: High Temperature Thermoplastic,UL 94V-0.  
Contact: Copper Alloy  
Shell: STAINLESS  
PLATING:  
Contact: Plated 30u'' Ni Overall Contact Au 1U  
Shell: Plated 30u'' Ni Overall  
Plated 1u''Au Selective Contact Area  
Electrical:  
Current Rating : 1.0 A AC/DC max.  
Voltage Rating : 30V AC/DC  
Ambient Temperature Range : -20° C~+60° C  
Storage Temperature Range : -40° C~+70° C  
Ambient Humidity Range : 95% R.H. Max.  
Contact Resistance:100mΩ max.  
Insulation Resistance:1000MΩ min./500VDC  
Mating Cycles: 3000Insertions  
Temperature: 260° C ± 5°

|                                             |  |                 |                    |
|---------------------------------------------|--|-----------------|--------------------|
| 龙创中业电子科技（东莞）有限公司                            |  |                 | DATE 2014/3/27     |
| TITLE:<br>产品名称 SIM PUSH 6+2P H1.8 5.25/8.65 |  | UNIT<br>单位 mm   | DESIGNED<br>设计 罗正富 |
| PART NUMBER:<br>零件编号 LCZY-102011322         |  | SCALE<br>比例 1:1 | CHECKED<br>核准 罗利斌  |
| DRAWING NUMBER:<br>图纸编号                     |  | SHEET<br>页码 1/1 | APPROVED<br>审批 张华宇 |

| TOLERANCES UNLESS |              |
|-------------------|--------------|
| X. ± 0.50         | X° ± 3°      |
| .X ± 0.38         | .X° ± 2°     |
| .XX ± 0.25        | .XX° ± 1°    |
| .XXX ± 0.10       | .XXX° ± 0.5° |