


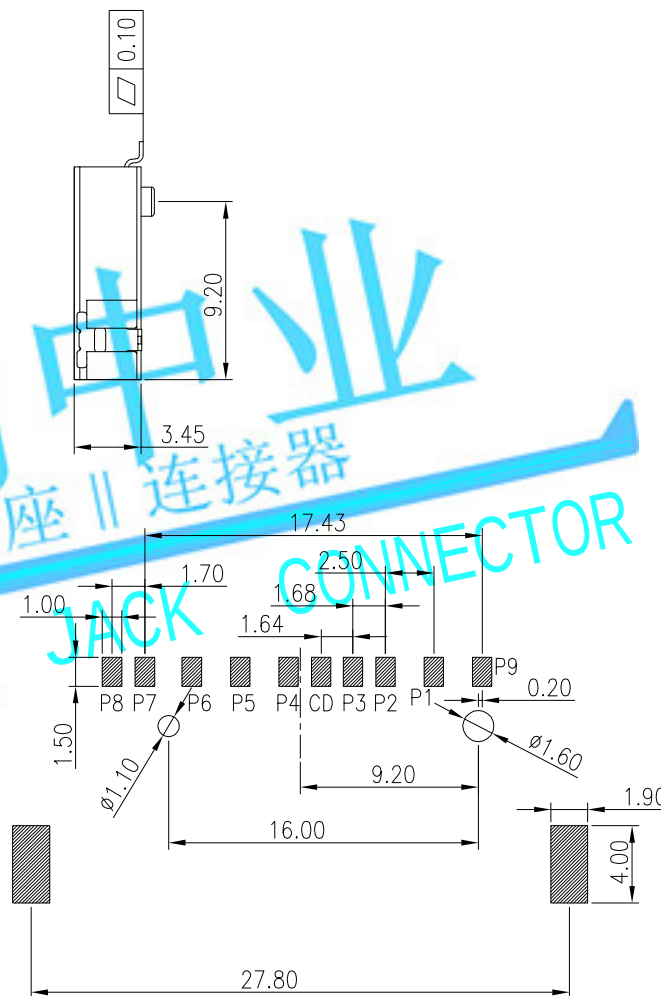

ES:
ERIAL:
Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
Shell: STAINLESS

PLATING:
Contact: Plated 30u'' Ni Overall Contact Au 1U
Shell: Plated 30u'' Ni Overall
Plated 1u''Au Selective Contact Area

Electrical:
Current Rating : 1.0 A AC/DC max.
Voltage Rating : 30V AC/DC
Ambient Temperature Range :-20° C ~+60° C
Storage Temperature Range :-40° C ~+70° C
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100mΩmax.
Insulation Resistance:1000VΩmin./500VDC
Mating Cycles: 3000Insertions
Temperature: 260° C ±5°

APPROVED	张华宇
审批	